
PARTS LIST

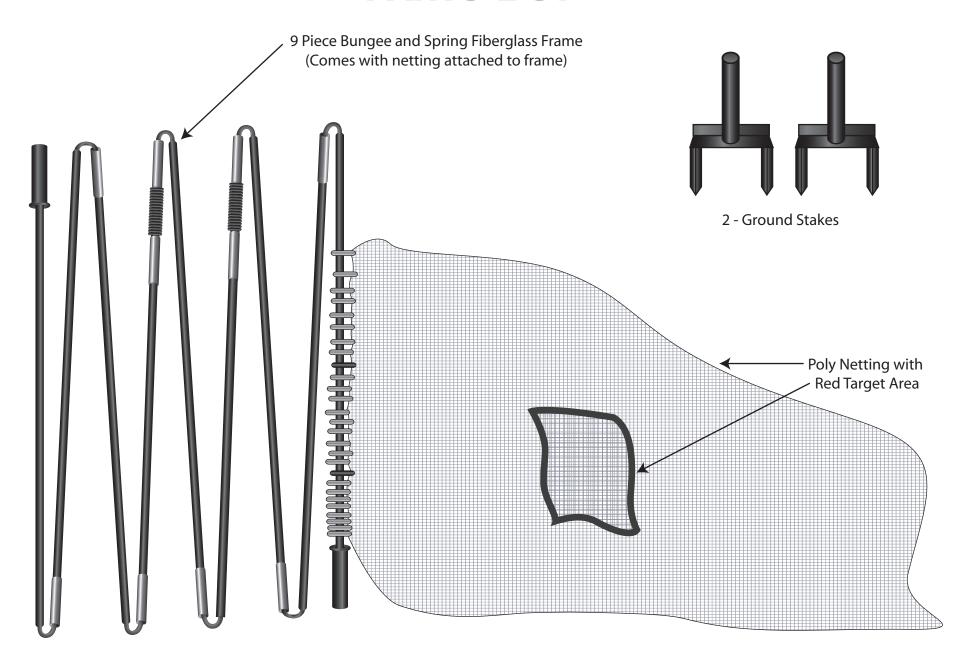

STEP 1 Tap or push both Ground Stakes into ground 7 feet apart. (Caution: Do not pound on the stake top. Damage could prevent frame from inserting properly) — 7 feet STEP 2 Assemble Fiberglass Frame by inserting each pole end into the adjoining metal joint. (Note: Make sure not to pinch the bungee cord)

STEP 4 Drape the Netting up and over the frame. (Note: The Red rings should be on the top-side corners) STEP 3 Insert each frame end into the Ground Stakes. 7 feet