


# Portable Power Station User Manual

VER.1.0

**Heater<sup>®</sup>**  
**SPORTS**

***HOT BOX<sup>™</sup>* 1200**



**Warning**

1. Please read this manual carefully before using the product.
2. Do not puncture, shock, collide or incinerate this product.
3. Non-professional persons are forbidden to dismantle the machine to prevent electric shock!

**Need Support?**

**Call 1-800-492-9334**

**[www.HeaterSports.com](http://www.HeaterSports.com)**

# About This Product

Thank you very much for using the multi functional portable power station produced by our company. If you encounter a power outage, or need electricity for travel, you can use this product to power your appliances or digital products. This power supply has a built-in high-quality lithium battery that supports DC, USB output, AC output. Before using this product, please read this user manual carefully and keep it for future reference.

## Notice

The purpose of this manual is to help you use the product correctly, but not represent any description of the hardware and software configuration of this product. For the configuration of the product, please refer to the contract (If any) related to this product, or consult the seller who sold the product to you. The pictures in this manual are for reference only. If any individual pictures that do not match the actual product, please refer to the actual product.


## This Portable Power Station Offers Pure Sine Wave Output

This portable power station built-in inverter offers pure sine wave output, which is consistent with mains electricity waveform. It provides fairly pure AC current for electrical appliances. And the traditional portable power stations USE modified waves inverters which may cause electrical appliances to make a certain amount of working noise and even cause electrical instability.


## Product Parameters

Size (L*W*H)	260*160*210 mm
Battery Capacity	120000mAh/444Wh
Weight	About 4.75kg
Built-in Battery Technology	100% original quality lithium battery
DC Input	18V/4.6A (φ5.5*2.1 mm)
Anderson Port	It supports 18V solar charging, and it is recommended to use solar panels above 100W
MPPT	Yes
Fully Charged Time	About 9hrs
USB Output	USB1&2 (QC3.0): 5V/3A 9V/2A 12V/1.5A USB-C PD 60W: 5V/3A 9V/3A 12V/3A 15V/3A 20V/3A (In/Out) USB-C PD 18W: 5V/3A 9V/2A 12V/1.5A
DC Output	DC*1+Cig Port*1. 12V/15A (Max)
AC Output	This manual is commonly used for AC 110V–240V/ 50Hz–60Hz energy storage products. (Important: the actual AC output voltage is different in different countries and regions, please refer to the actual product).
AC Power	Continuous Power: 500W
LED Lighting	Press the LED button in turn, the light will be Bright, Strobe, SOS, and OFF
LED Lighting Power	2W
Battery Indicator	Symbol of battery cell, one cell represents 25% of power
Ambient Temperature	Charging: 0–40°C    Discharging: -10–40°C Storage: 0–35°C
Cycle Life	500+ Times


# Identification and Instructions



Front View




Back View



Left/Right View

- 1: Anderson Port
- 2: DC Input Indicator
- 3: DC Charging Input
- 4: DC Output
- 5: DC Power Button
- 6: Car Cigarette Port
- 7: AC Power Button
- 8: AC Output
- 9: USB Power Button
- 10: USB-C PD 60W Port
- 11: USB1 QC3.0 Port
- 12: USB2 QC3.0 Port
- 13: USB-C PD 18W Port
- 14: LCD Display
- 15: LED Lighting Panel
- 16: LED Button
- 17: Cooling Fan

## LCD Display Screen

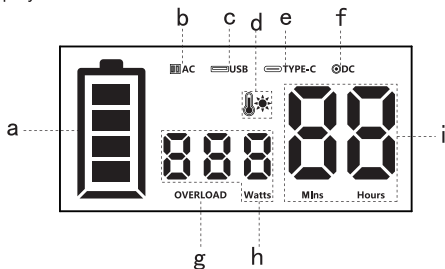

### a: – Electric Quantity Symbol

One cell is 25% of electric quantity. When charging, the battery column cell increases upward by cell flicker. When the electric quantity reaches 100%, four cells light up and stops flickering, then “FUL” symbol will be shown.

### b: AC – AC Output Symbol

Press the AC button for a long time to turn on the power. The symbol will light up. At this time, the AC output socket of the product can be used for output. If the AC socket is not used, please long press the AC button in time to power off. The AC symbol will disappear, which can reduce unnecessary loss (When the AC output is on, the product will always be in power on state and will not be closed automatically).

**Support charging and discharging at the same time.**

### c: USB – USB Output Symbol

Short press the power button to turn on the power, and the USB port can be output; when the device output is loaded, the USB symbol is on (Four fast charging USB ports).

### d: – High Temperature Alarm Symbol

If temperature is too high when in using, this symbol will be on.

## e: **TYPE-C** – Type-C Output Symbol

Short press the power key to turn on the power, and then the Type-C port can be output. When the device output is loaded, the Type-C port symbol is on (PD 60W supports automatic wake-up);

When charging the product via USB-C PD 60W port, the related charging watt and Type-C port symbol will be on.

## f: **DC** – DC Output Symbol

After short press the power key to turn on the power, the DC output function of the product can be used. This symbol lights up when the device output is loaded.


## g: **OVERLOAD** – Overload Alarm Symbol


When the product is overloaded, the overload alarm symbol will be on, the corresponding port symbol will flash, the automatic protection will be turned on and the output will be closed; after the load is removed, the symbol will be closed, AC will be automatically recovered, and other button can be pressed for recovery;

## h: – Real Time Power Display Symbol

When the power supply is charged or discharged, the current input or output power is displayed (Only charging power is displayed when charging and discharging at the same time).



## i: – Real Time Use of Time Symbols

 When the product is charging the electric appliance, the letter hours under the number is on, and the data displayed is the remaining service hours of the power supply items (Only displayed as an integer when it is more than one hour);

 When the product is charging the electric appliance, the letter mins under the number is on, and the data displayed is the remaining minutes of use of the power supply items (Only displayed as an integer when it is less than one hour).

# Charging Mode

---



Note: DC input port is  $\phi 5.5 \times 2.1\text{mm}$

## Safety and Maintenance

- 1) Do not short-circuit the device. Please avoid storing this device with coins, bracelets, keys and other metal objects.
- 2) Do not heat the device or put it into fire, water and other liquids at high temperatures, including direct exposure to the sun;
- 3) Do not place the device in a highly humid and dusty environment;
- 4) Do not bump or uninstall the device;
- 5) Do not drop, place heavy objects or strongly impact the product;
- 6) Please avoid low physical, perceptual and mental abilities (Including children) and inexperience people using this product. Use this product only if it is supervised or directed by someone responsible for their safety.
- 7) Please avoid children playing with this product;
- 8) Do not cover the product with towels, clothes and other articles when using;
- 9) The product may generate heat when charged. This is normal. Be careful when handling;
- 10) Please dispose of end-of-life products according to regulations, and do not dispose of the built-in battery as household waste, so as not to cause explosion and pollution;
- 11) Use the product normally and avoid electric shock.

## Products Usage Tips

- 1) This product is built in high-quality original lithium ion battery, no memory effect, large capacity and durable. But we still recommend users to use in the range of 10–30°C to obtain the optimal charging capacity;
- 2) Please stay away from TV, radio and other equipment to avoid interference during charging;
- 3) If the device has not been used for a long time, please disconnect the cable before storage;
- 4) To extend the life of the product (Lithium battery), it is best to charge it once within 3 months, at least once within 6 months.



# Recycling

Be sure to take used electronics, batteries, and packaging materials to a special recycling site. This can help prevent uncontrolled waste disposal and help promote material recycling.

## Battery Information

The device has a built-in non-removable rechargeable battery. Do not attempt to remove the battery to avoid damaging the device. Batteries can be charged and discharged hundreds of times, but eventually fail.

## Statement

All rights reserved, without the written permission of the company, any unit or individual shall not extract or copy part or all of the contents of this book, and shall not be disseminated in any form. Other trademarks appearing in this manual are owned by their respective owners. Due to product version upgrades or other reasons, the contents of this manual will be updated from time to time. Unless otherwise agreed, this manual is only used as a guide, and all statements, information and suggestions in this manual do not constitute any express or implied warranty.

