



Home Batting Cage

Assembly Instructions

IMPORTANT

DO NOT RETURN THIS BATTING CAGE TO THE RETAIL STORE WHERE PURCHASED. **CALL TOLL FREE: (800) 492-9334**

IMPORTANT WARRANTY WARNING:

DO NOT LEAVE THE XTENDER CAGE ASSEMBLED DURING HEAVY SNOW, SLEET, OR ICE STORMS. THE XTENDER IS NOT DESIGNED TO WITHSTAND EXTREME WEATHER CONDITIONS AND DAMAGE TO THE FIBERGLASS FRAMES CAUSED BY EXTREME WEATHER MAY NOT BE COVERED IN THE MANUFACTURERS WARRANTY.

WARNING:

USE THIS PRODUCT WITH ADULT SUPERVISION ONLY. SERIOUS BODILY INJURY MAY OCCUR!
READ WARNING LABELS CAREFULLY.




PARTS LIST

Fiberglass Pole Sections (Three Bundles)

Part# A - Fiberglass Rod with Metal Insert Tip
(Quantity - 21)



Part# B - Fiberglass Rod (No Metal Tip)
(Quantity - 3)




Part# C - Ground Stakes
(Quantity - 6)




Part# D - Roll Of Black Tape
(Quantity - 1)



Part# E - Rope Stake
(Quantity - 4)

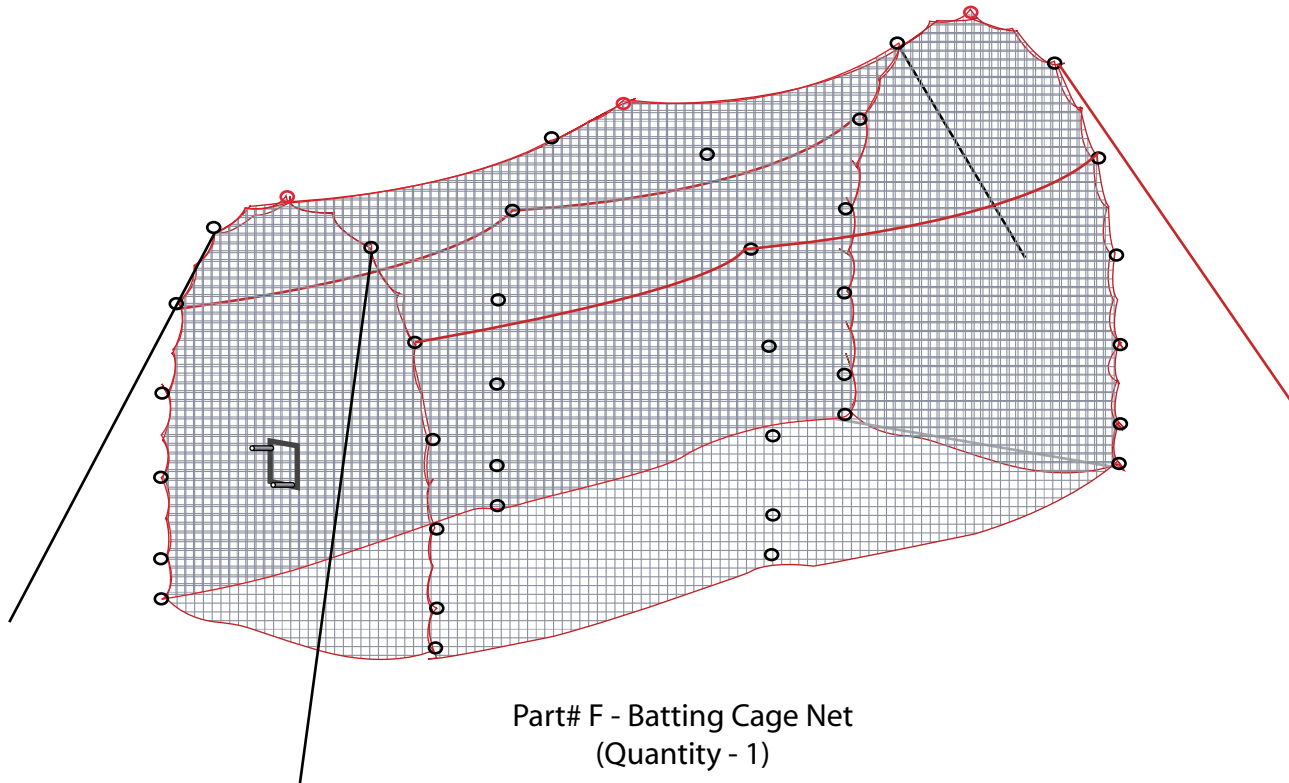

Part# F - Batting Cage Net
(Quantity - 1)

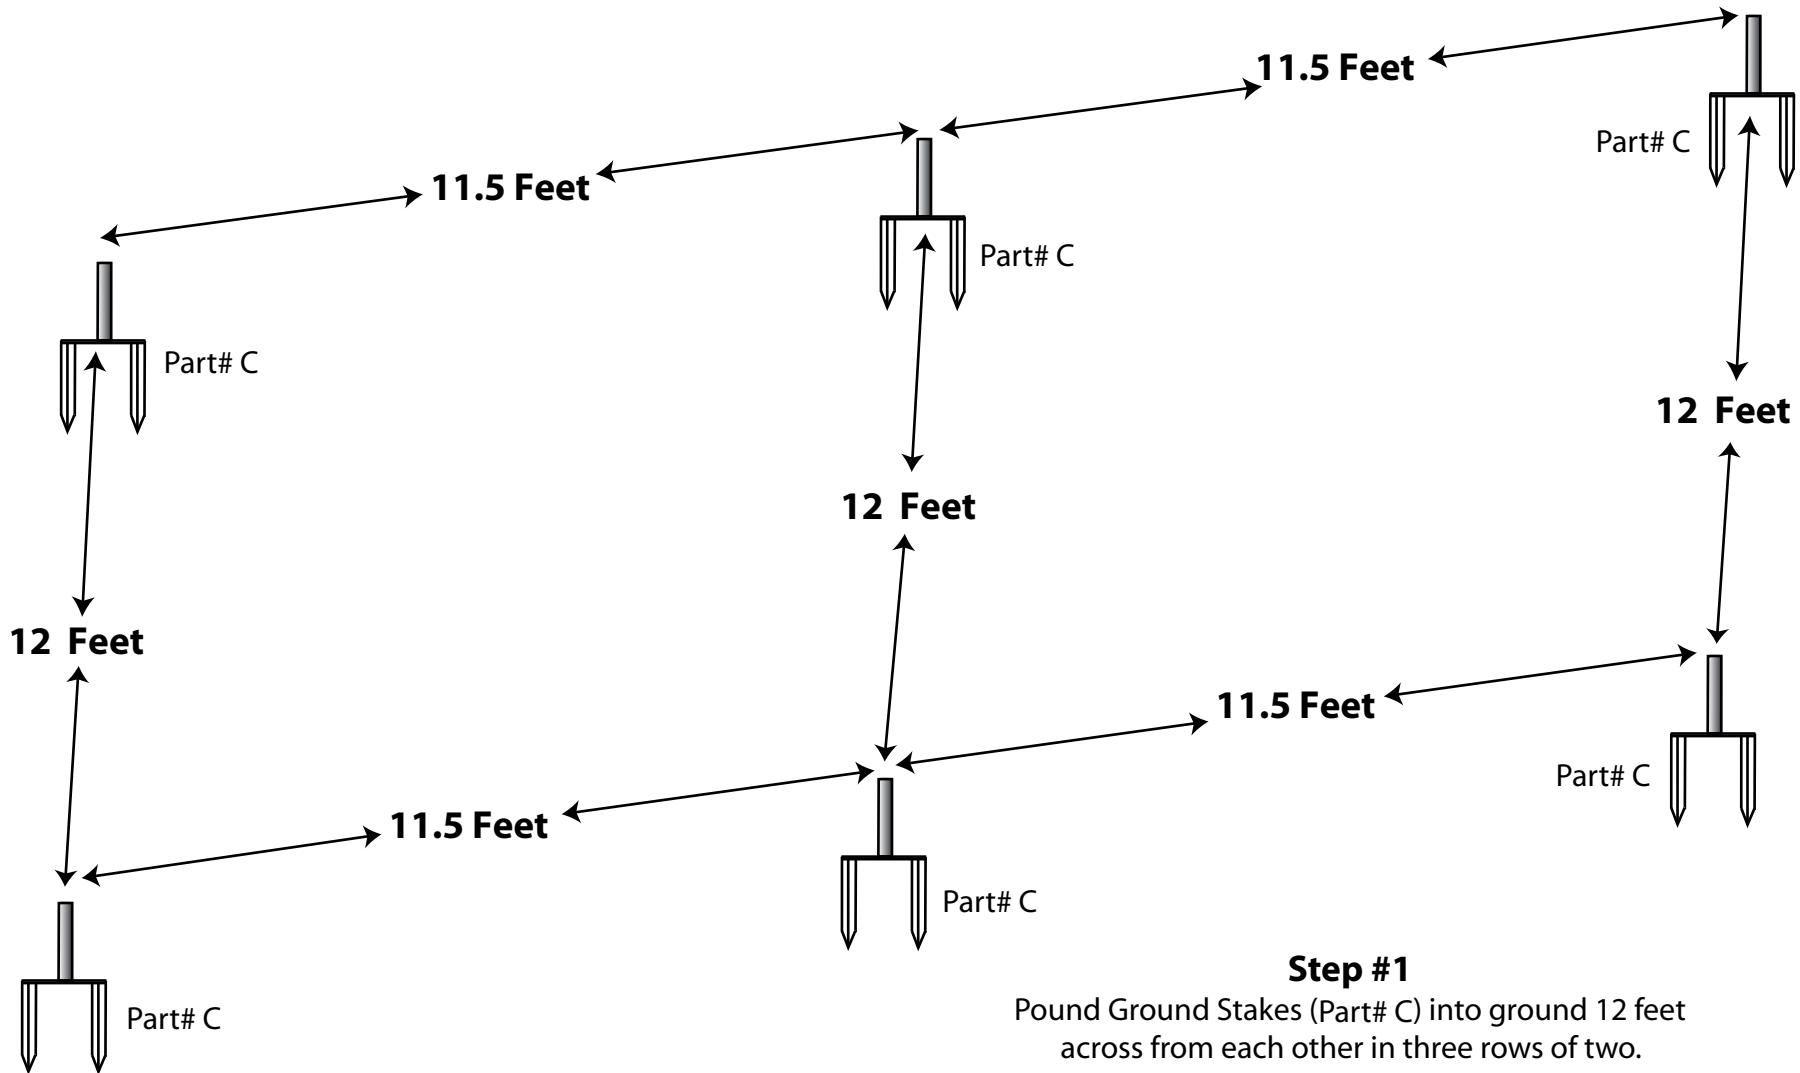

Step #1

Pound Ground Stakes (Part# C) into ground 12 feet across from each other in three rows of two.

Each row needs to be 11.5 feet apart.

(See diagram)

Note: Make Sure Stakes Are Perfectly Straight Up And Down.

Step #2

Connect 7 Metal Insert Tipped Rods (Part# A)
End-to-End

Put Single Fiberglass Rod (Part# B)
on end to complete one
of the three fiberglass poles

Fiberglass Rod
(No Metal Tip)
(Quantity - 1)
Part# B


Fiberglass Rod with
Metal Insert Tip
(Quantity - 7)
Part# A



Part# D

Step #3


Wrap each area where the rods
join with black tape to
keep joints from coming apart.

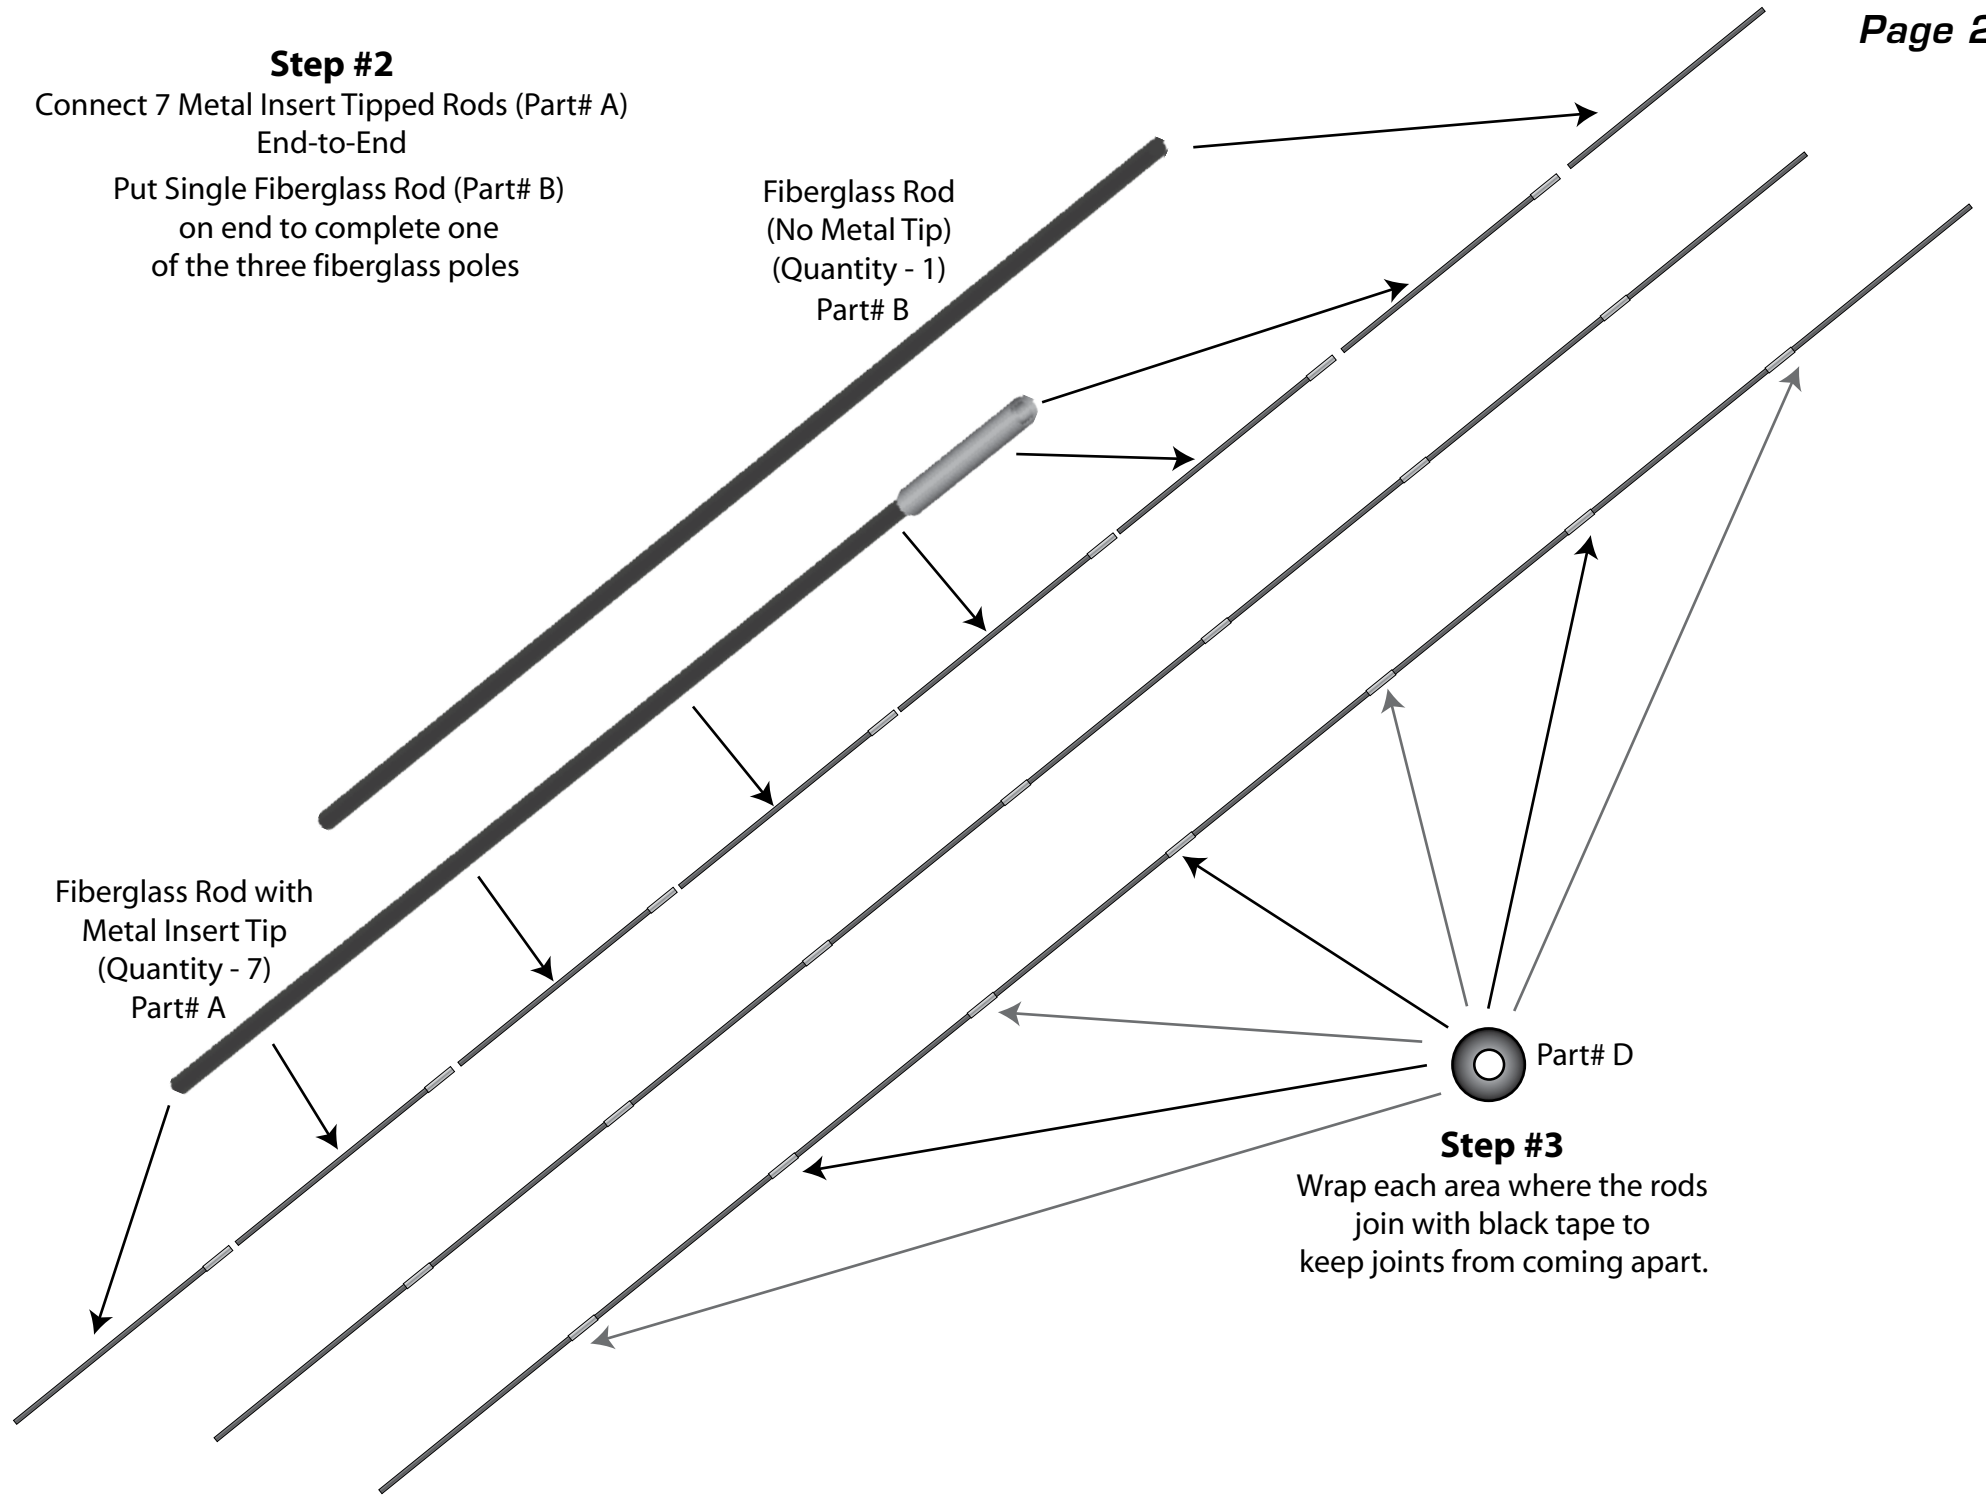

Step #4

Slide each of the three fiberglass poles through the rows of rings on the net.
(There are three rows of rings on each end and in the middle)

Note: *The center ring is colored red to indicate the top peak of the cage.*

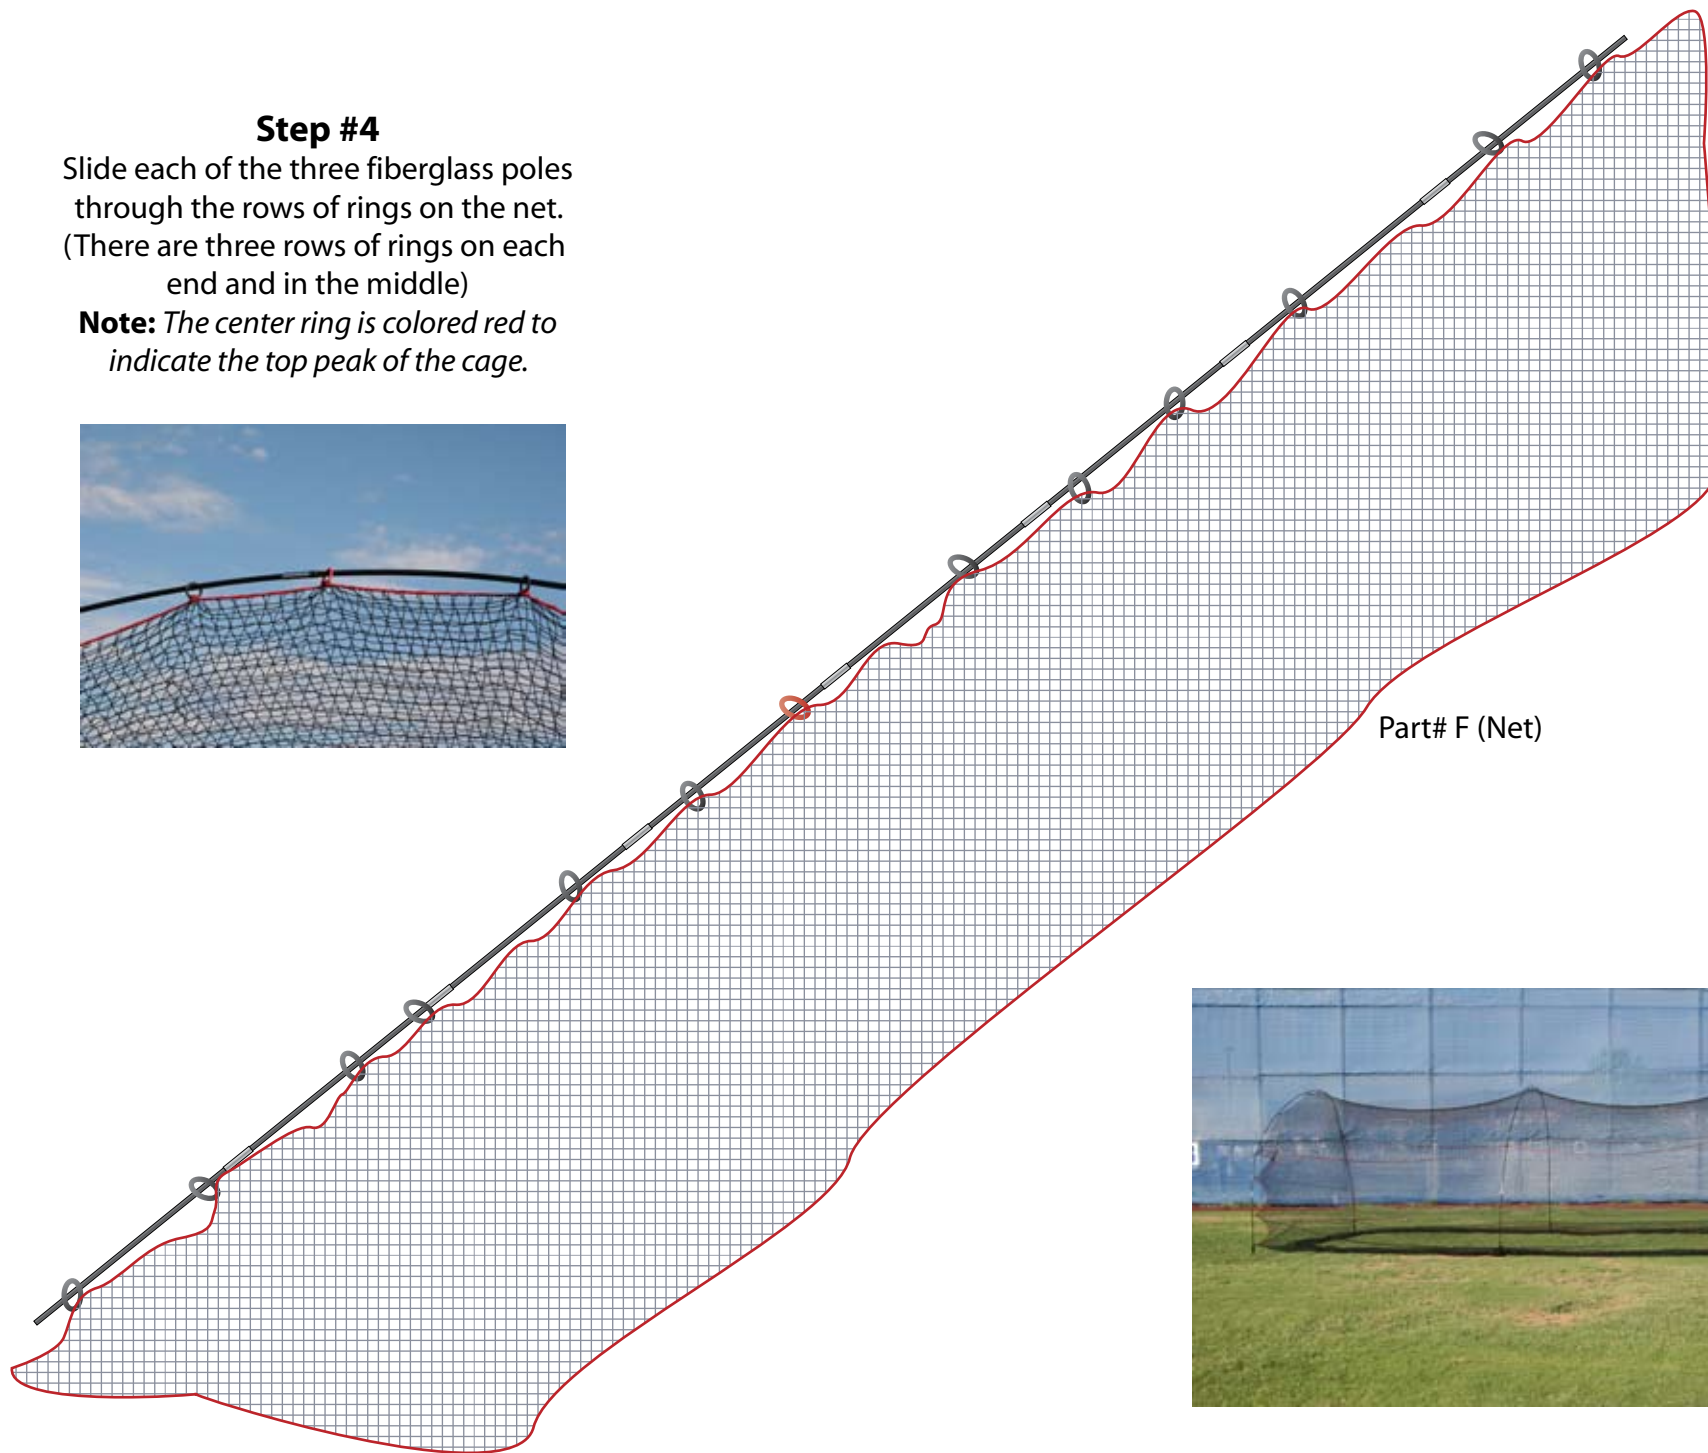



Part# F (Net)



Step #5


Insert each of the fiberglass pole ends into the ground stakes by arching the poles to form the cage.

Note: Make sure the "Red" center ring is positioned at the top peak of the cage.

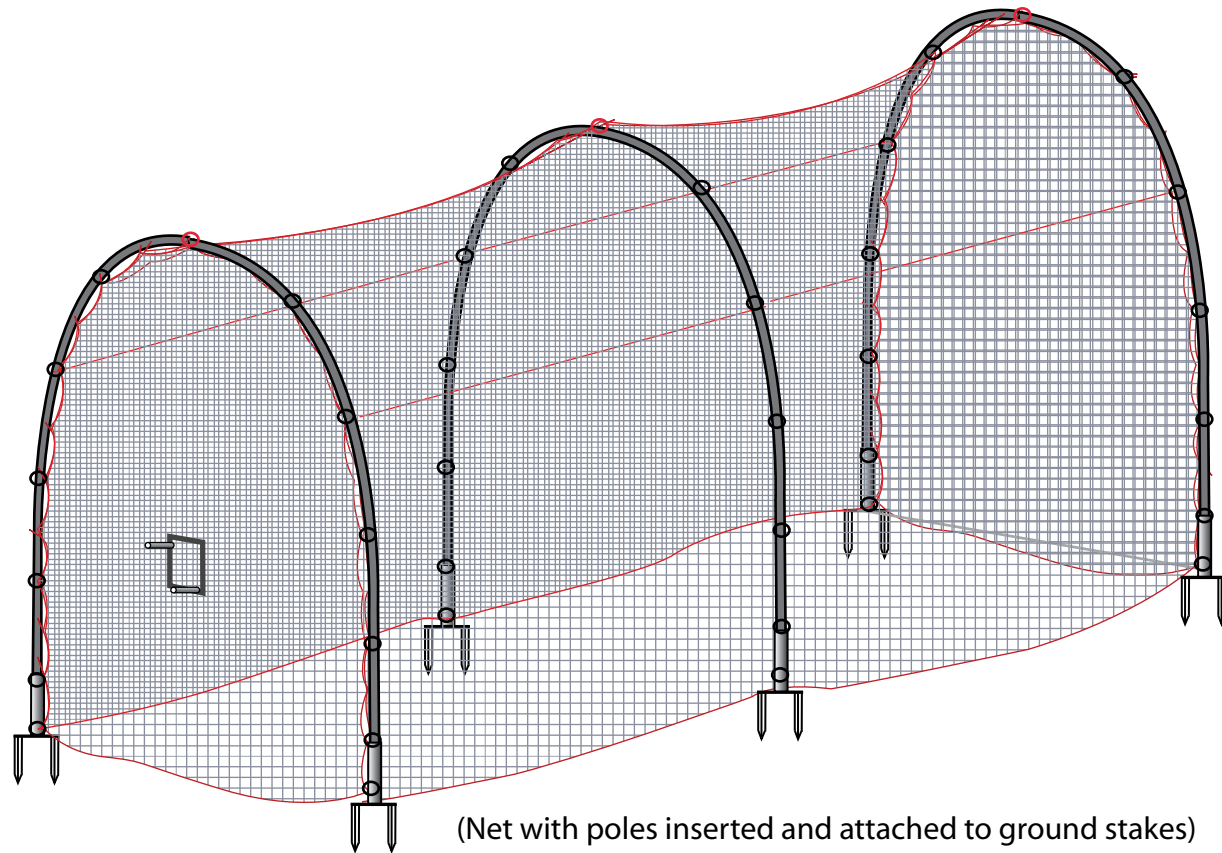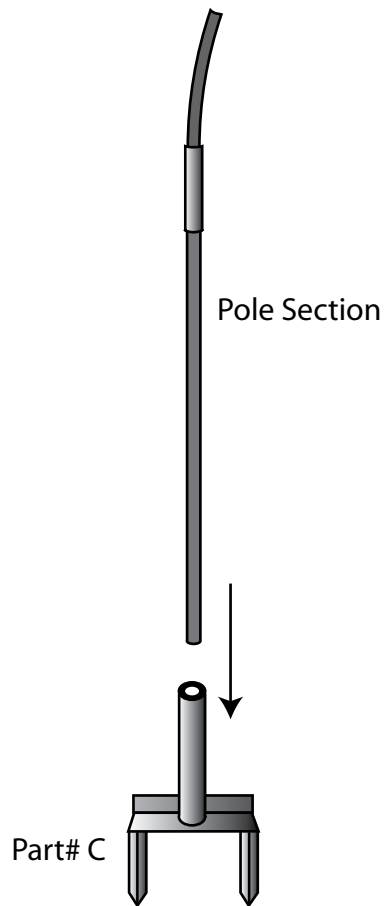


Step #6

Locate support ropes attached to rings on both ends of the netting. (Support ropes should be attached to the first ring down from the red center ring.)

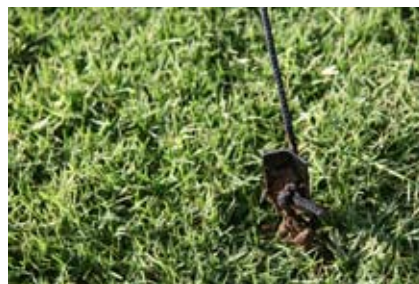

Step #7


Attach support ropes to ground stakes (Part# E) by making a knot in the end of the rope at the appropriate distance to keep the rope tight.

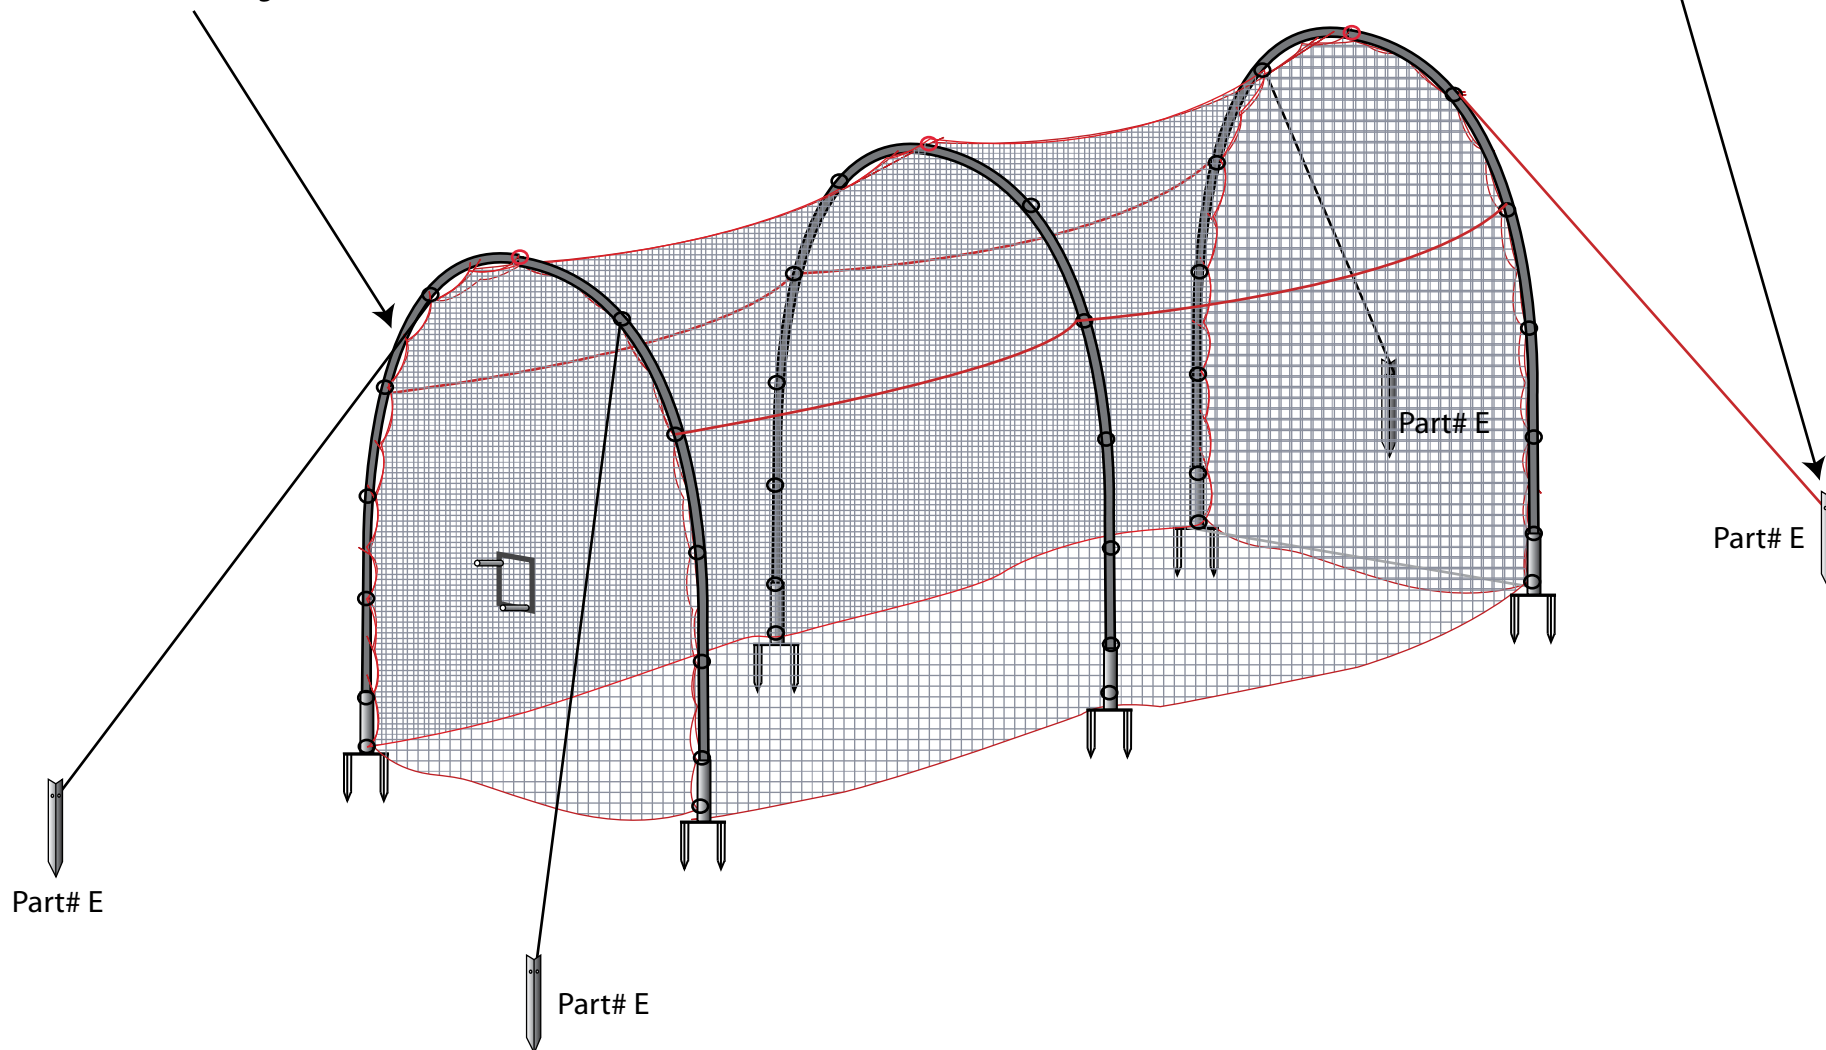

Optional: Joining 2 Cages (Must purchase 2 separate cages) INSTRUCTIONS

Step #1


Fully assemble both batting cages
and place them end-to-end
4-2 inches apart.

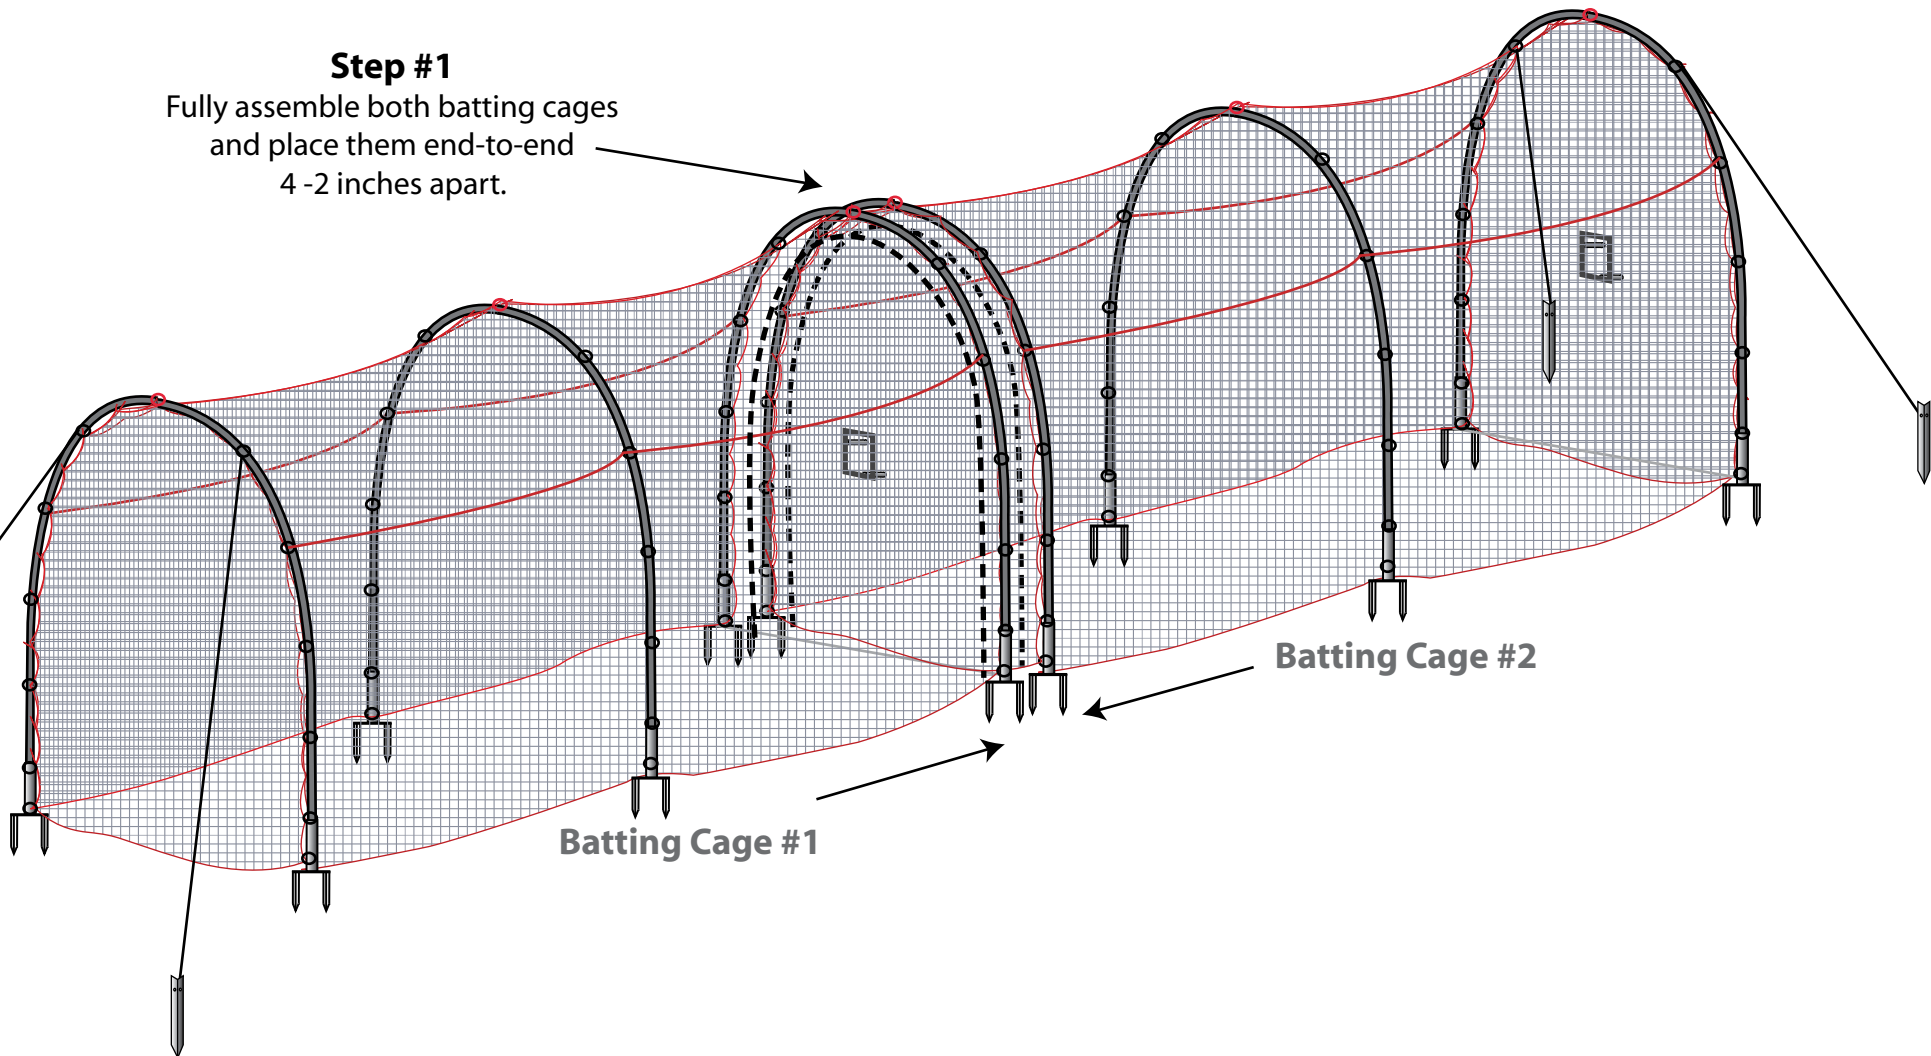

Joining 2 Cages INSTRUCTIONS

Step #2


Match the red reinforced seams together where the cages meet. Using the **extra support ropes** weave the two cages together.

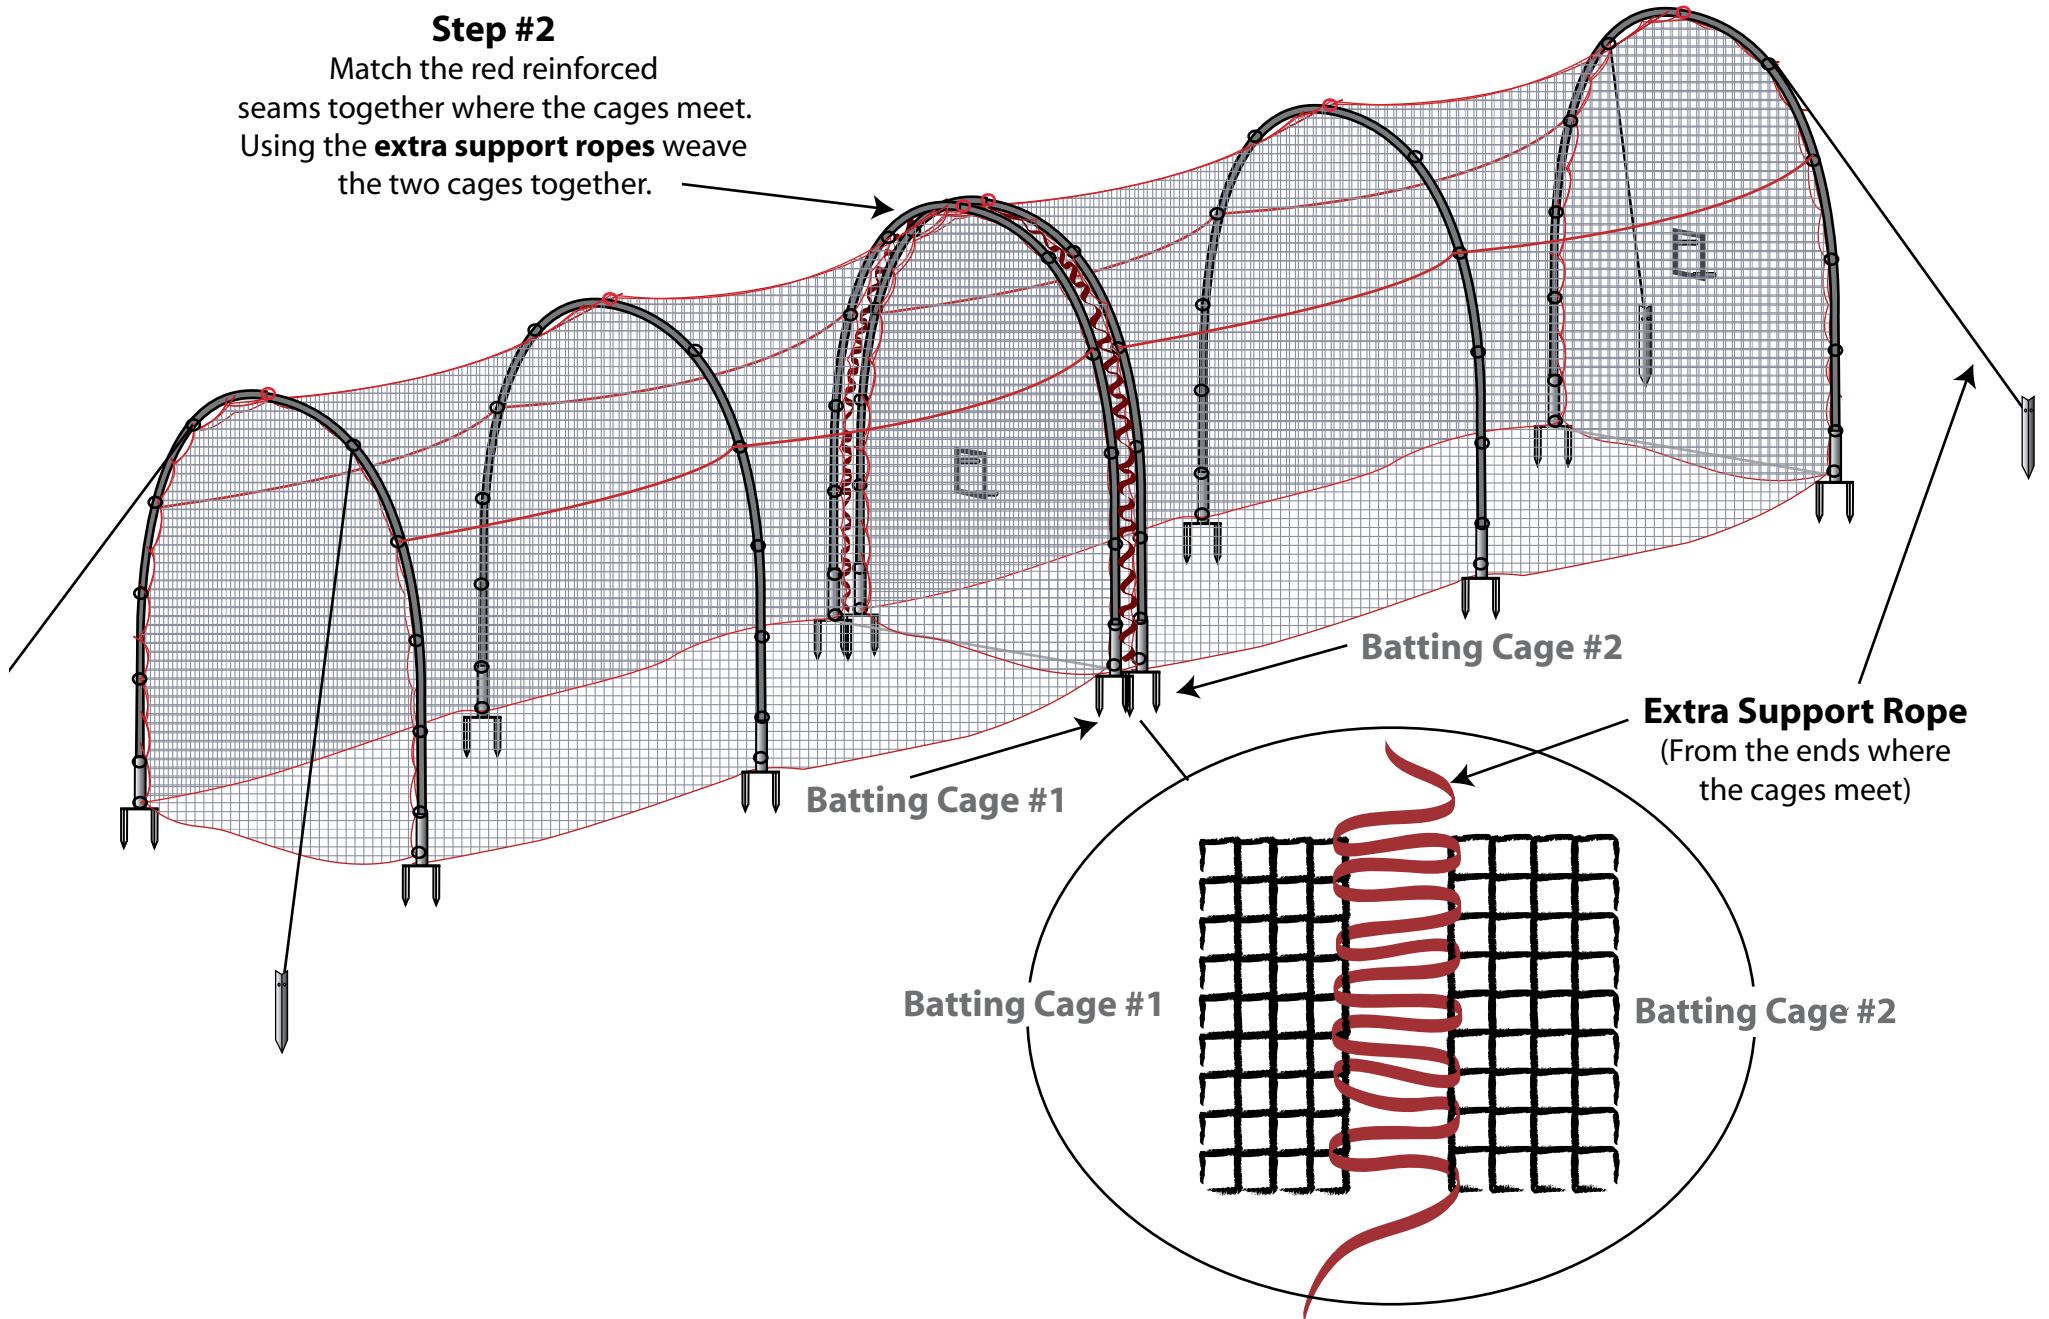

Joining 2 Cages INSTRUCTIONS

Step #4

Using scissors, cut an opening in the netting where the stitched netting come together on both cages.

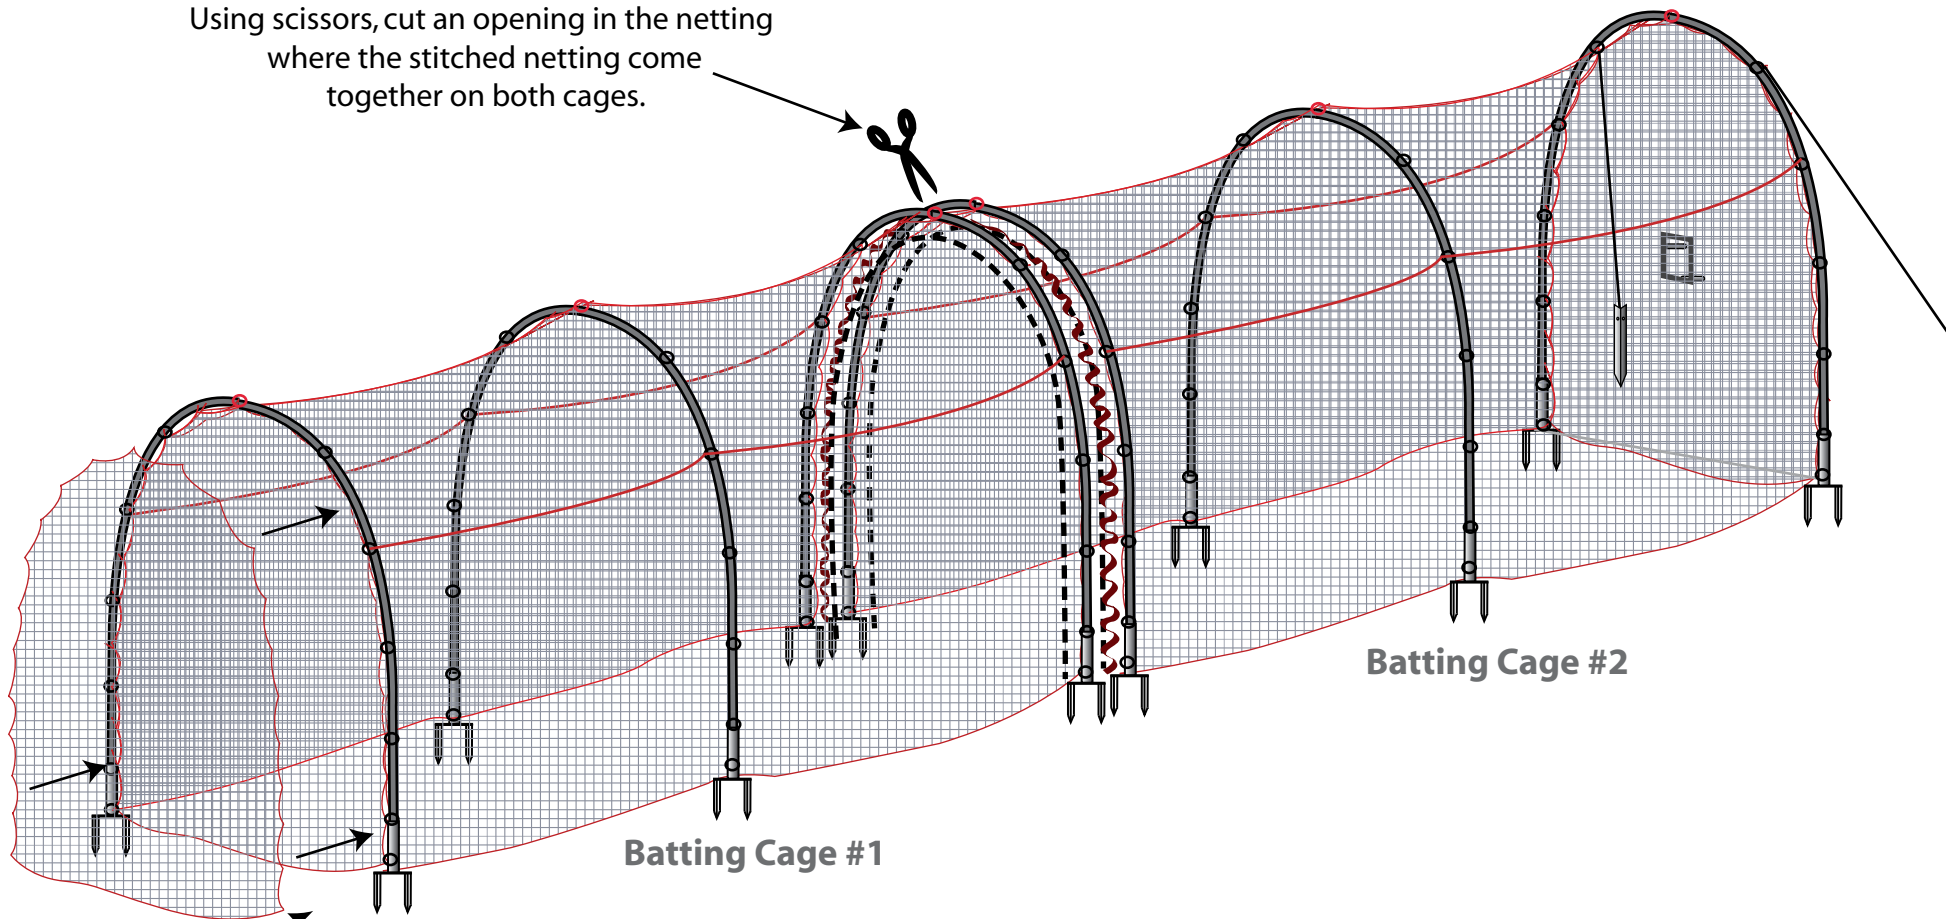

Step #5 (Optional)

After cutting the netting on both cages take the extra netting and attach it to the end of the cage opposite the Pitching Machine Harness. This extra netting will provide additional support and cushioning to the backstop area.