



Assembly Instructions

IF YOU EXPERIENCE ISSUES WITH THIS CAGE, DO NOT RETURN TO THE RETAIL STORE WHERE PURCHASED - CALL TOLL FREE: (800) 492-9334

IMPORTANT

- Use this product with adult supervision only. Serious bodily injury could occur!
- Do not allow anyone to stand too close to the net or serious bodily injury could occur - the net expands when a bat, ball, or object hits it.
- Do not leave this cage assembled during wind, rain, hail, or snow storms. The cage is not designed to withstand extreme weather conditions and damage to the fiberglass frames caused by extreme weather may not be covered in the manufacturer's warranty.





For additional products and accessories visit: **www.HeaterSports.com**
95 West 650 South • St. George, Utah 84770 • PH: 800-492-9334 • PH: 435-656-1756 • Fax: 435-688-0741

PARTS LIST

Model# PA199

Fiberglass Poles (Quantity - 3 Pole Sets)

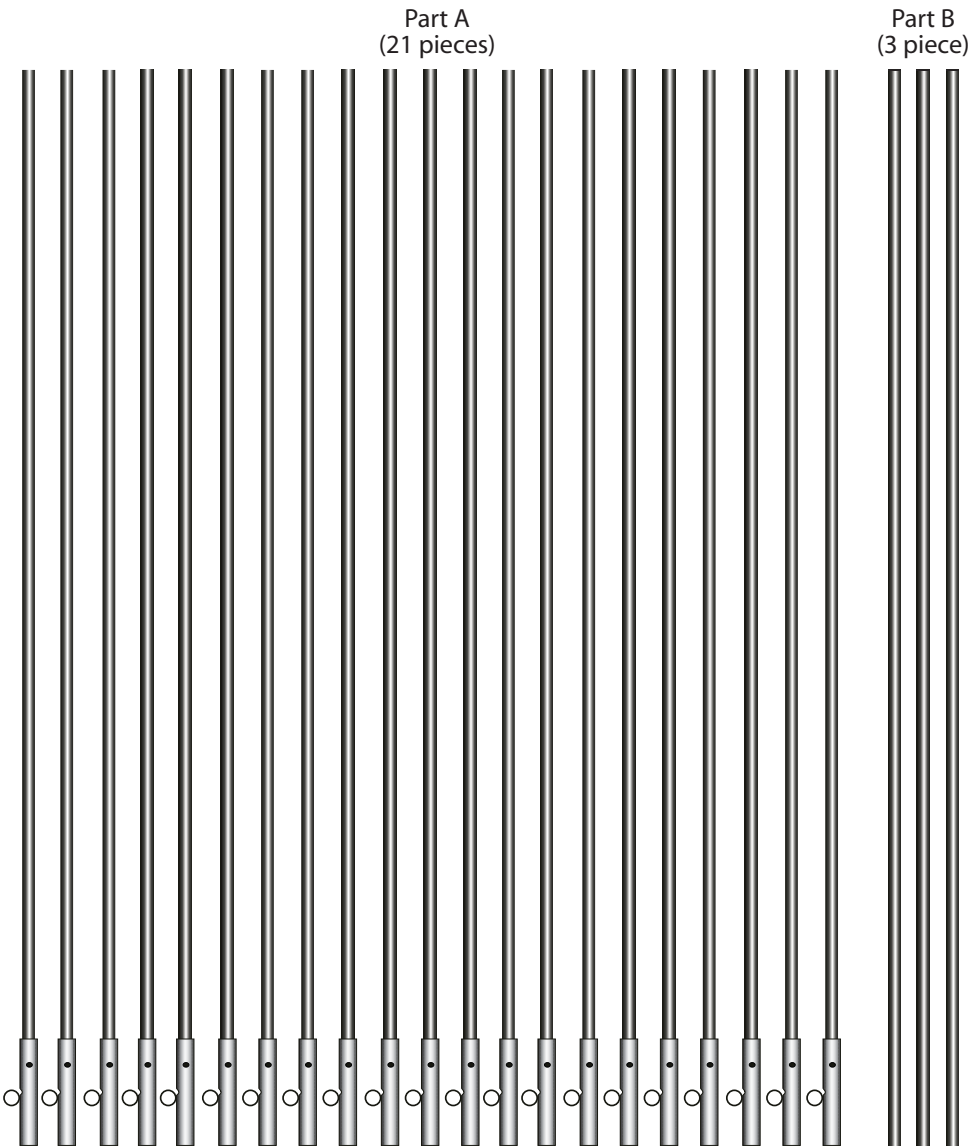

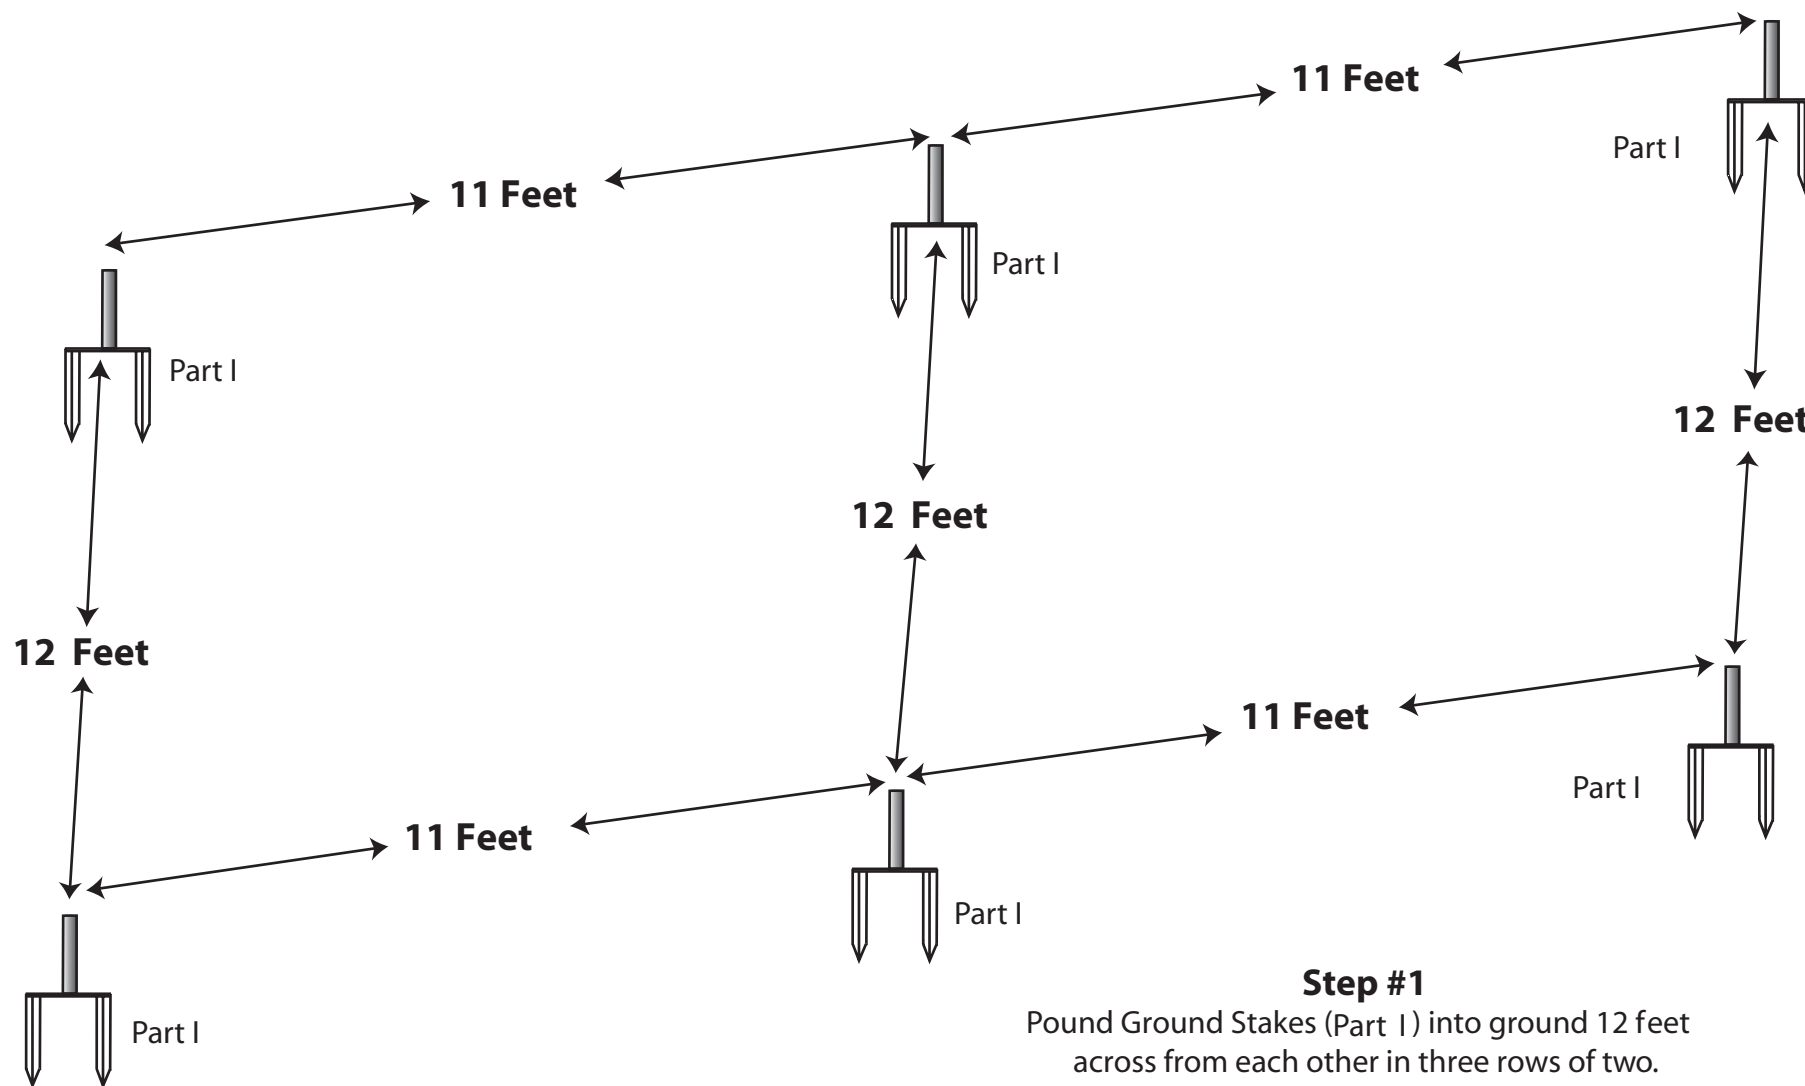

Step #1

Pound Ground Stakes (Part I) into ground 12 feet
across from each other in three rows of two.

Each row needs to be 11 feet apart.

(See diagram)


Note: Make Sure Stakes Are Perfectly Straight Up And Down.

Step #2

Connect 8 Fiberglass Rods to create one of three Pole Sections following the illustration to the right.

(Note: Make sure the guide rope rings are positioned on the same side of the pole assembly)

Repeat the process to complete three pole sections

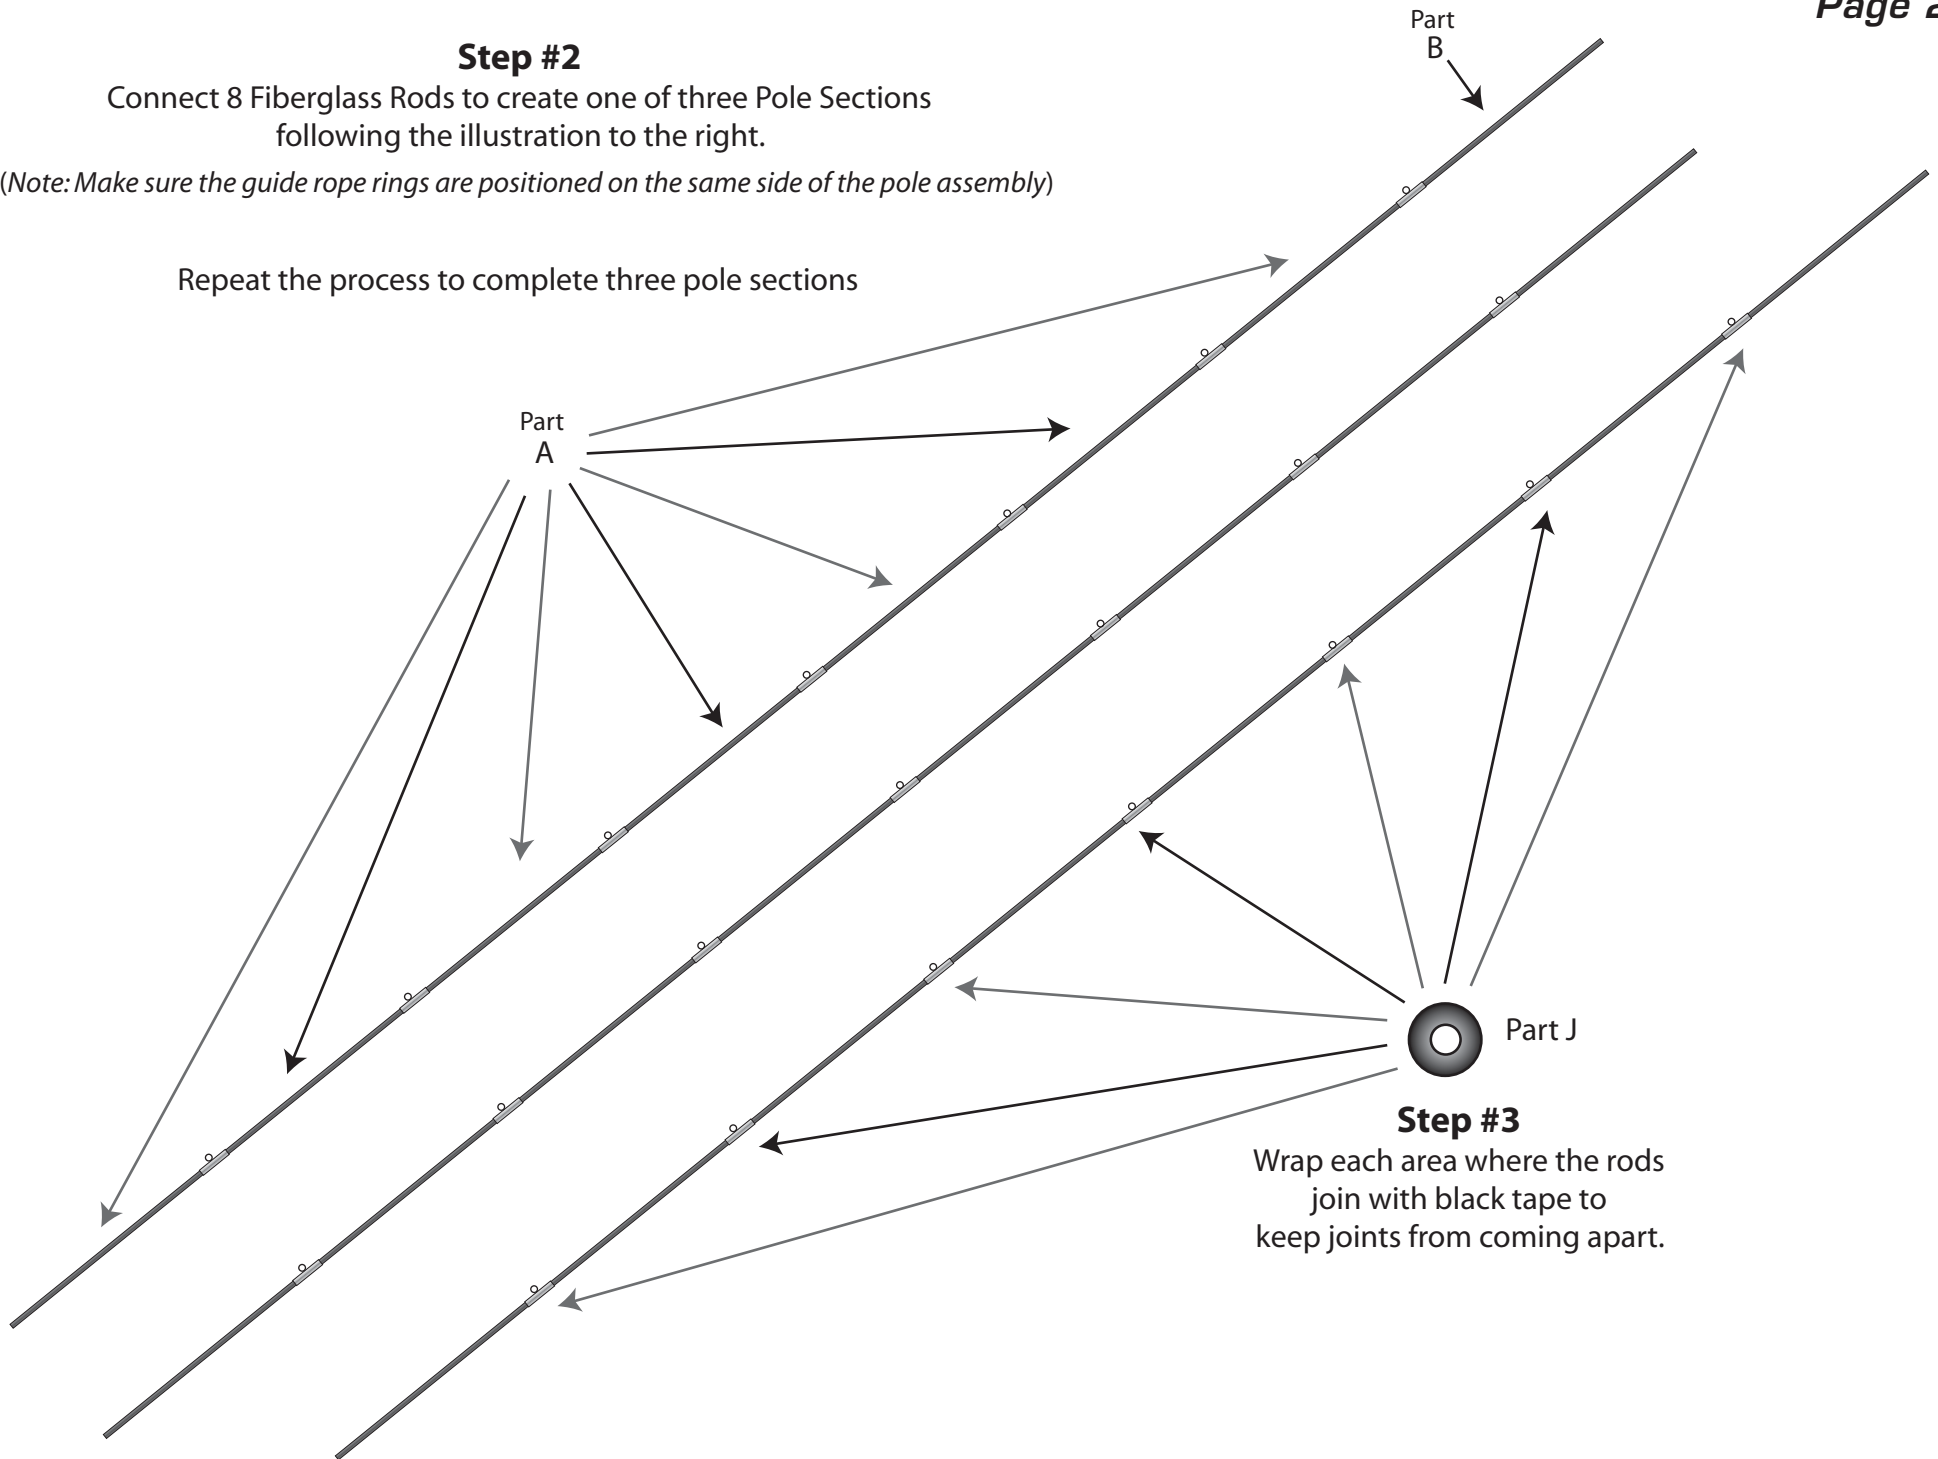


Step #3

Wrap each area where the rods join with black tape to keep joints from coming apart.


Step #4

Insert each of the fiberglass pole ends into the ground stakes by arching the poles to form the cage.

Note: When forming the poles into an arch, make sure to face the rope rings on the joint fittings inward so that the netting slides over the frames easily.

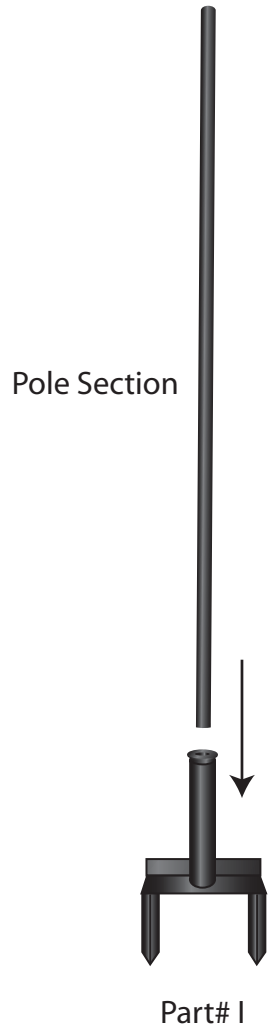**Step #5**

Take the Black Guide Ropes (Part F), and attach the ropes to the rope rings as indicated in the illustration below.

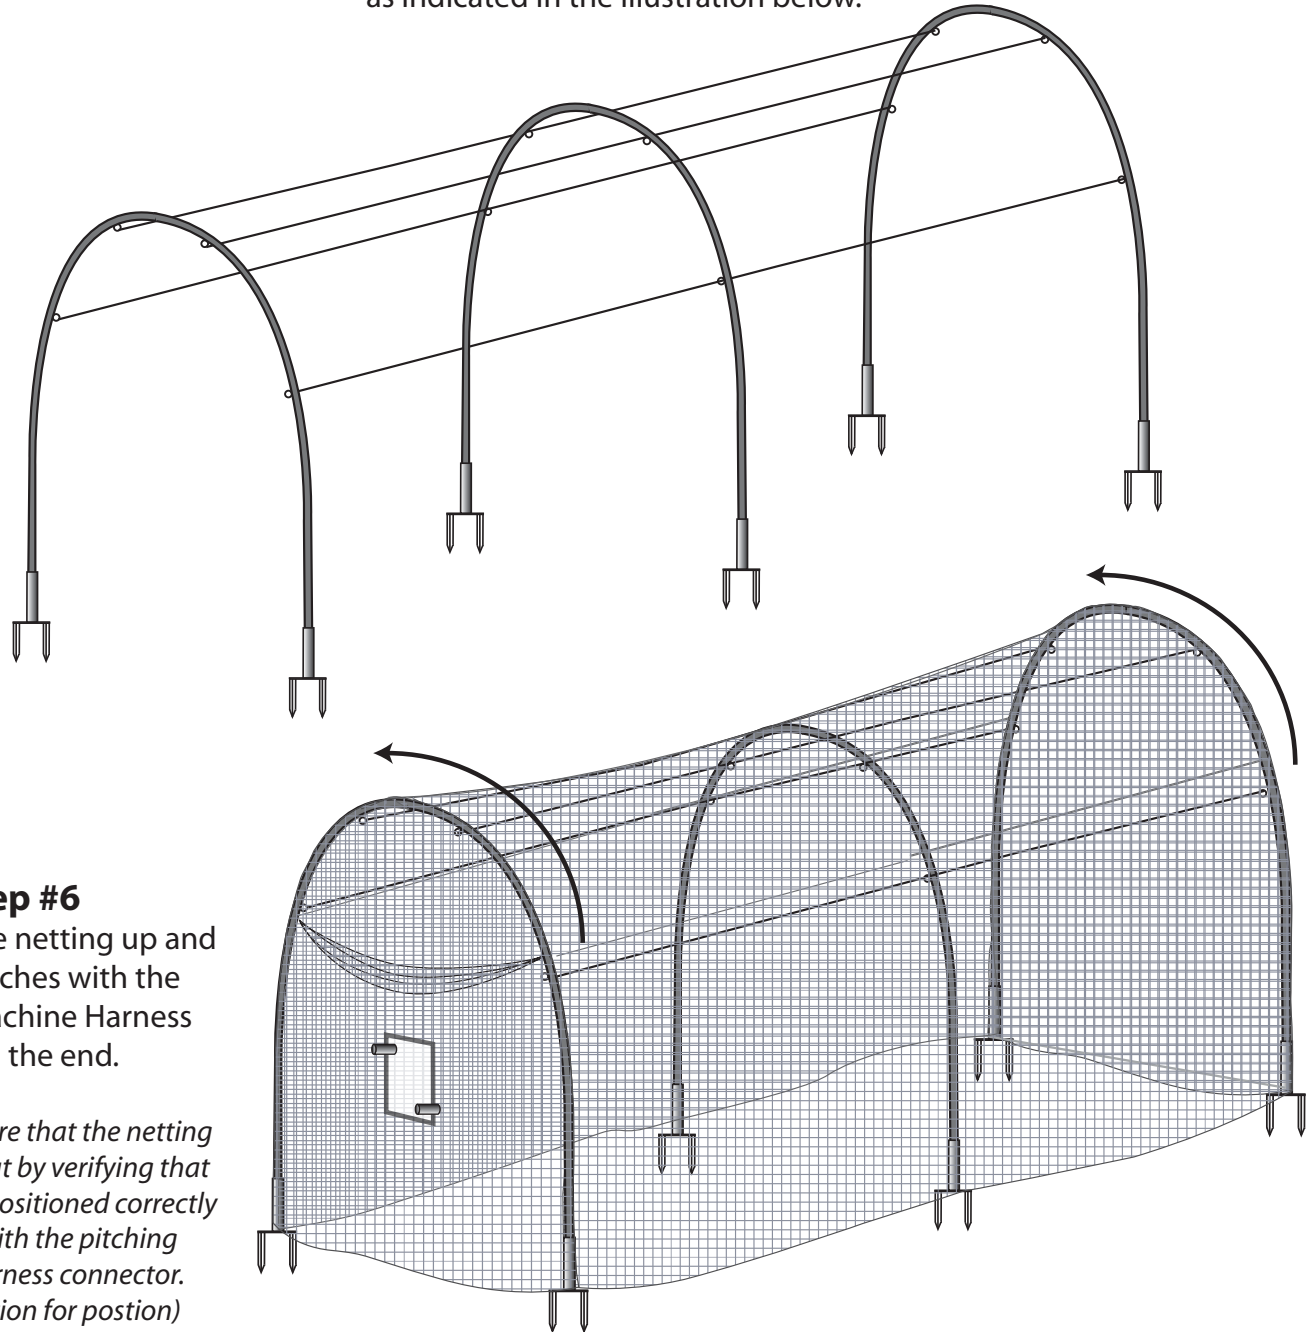**Step #6**


Next, slide the netting up and over the arches with the Pitching Machine Harness facing the end.

Note: Make sure that the netting is right-side-out by verifying that the harness is positioned correctly to line-up with the pitching machine harness connector. (See Illustration for position)

Step #7


Tie the White Support Ropes to the guide rope rings as indicated in the illustration below.
Pull the Support Ropes tight, and drive the Ground Stakes into the ground.

Note: To achieve the ultimate cage shape you may need to
adjust the Black Guide Ropes to allow for the correct
tension between the arched pole sections.
Also adjust the support ropes as needed to
maintain the desired cage height.

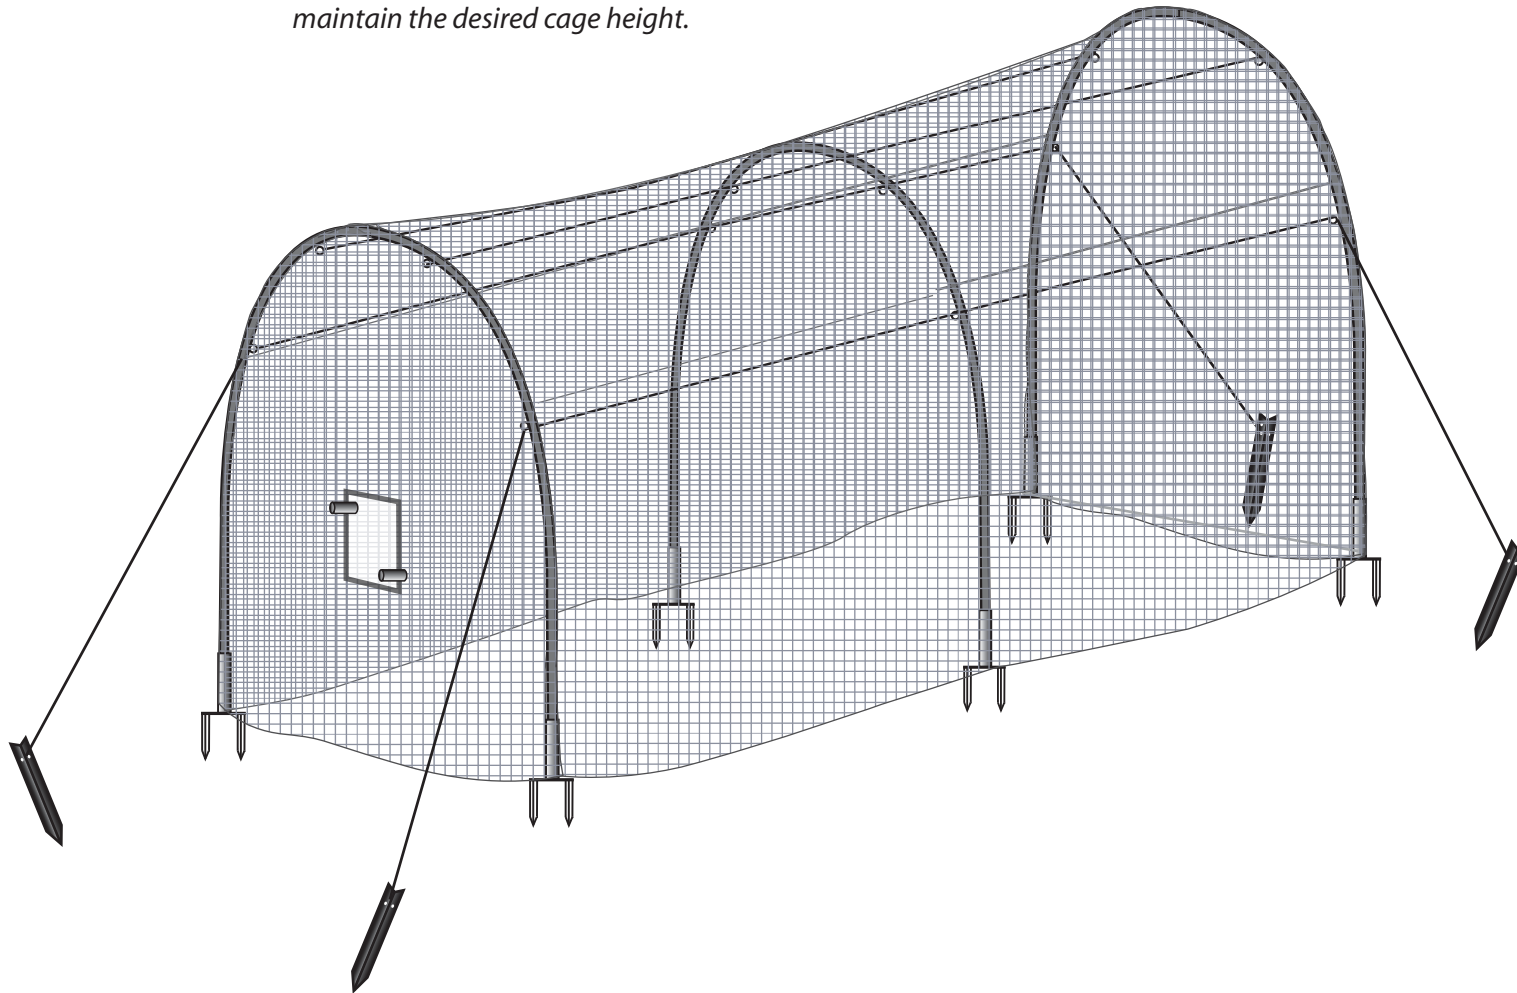

Pitching Machine Harness Connection

Heater Pitching Machines and Batting Cages are specifically designed to connect so that the pitching machine can remain outside the batting cage. This provides protection for the pitching machine and the machine operator.

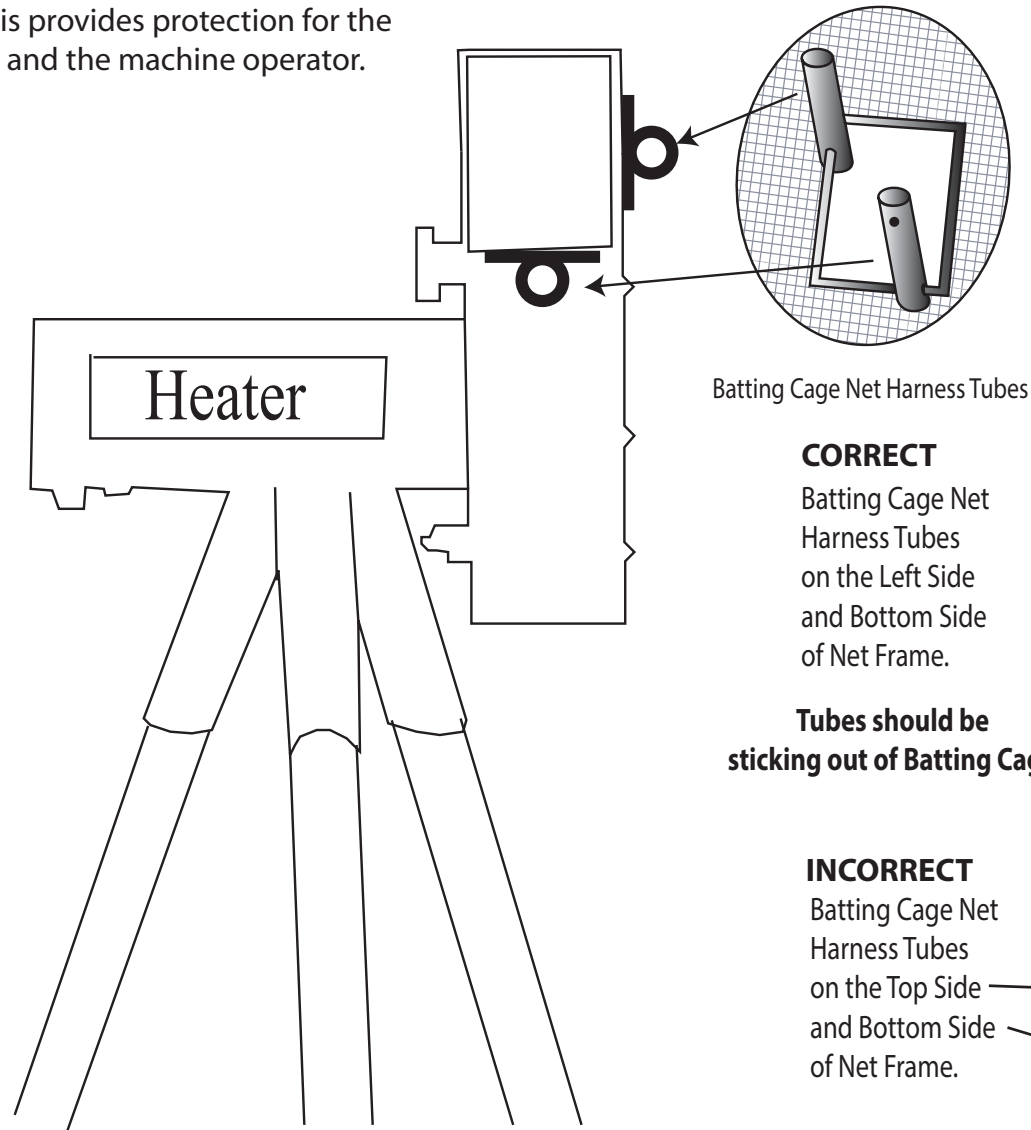


Joining 2 Cages

INSTRUCTIONS

Step #1

Fully assemble both batting cages and place them end-to-end 4 -2 inches apart.

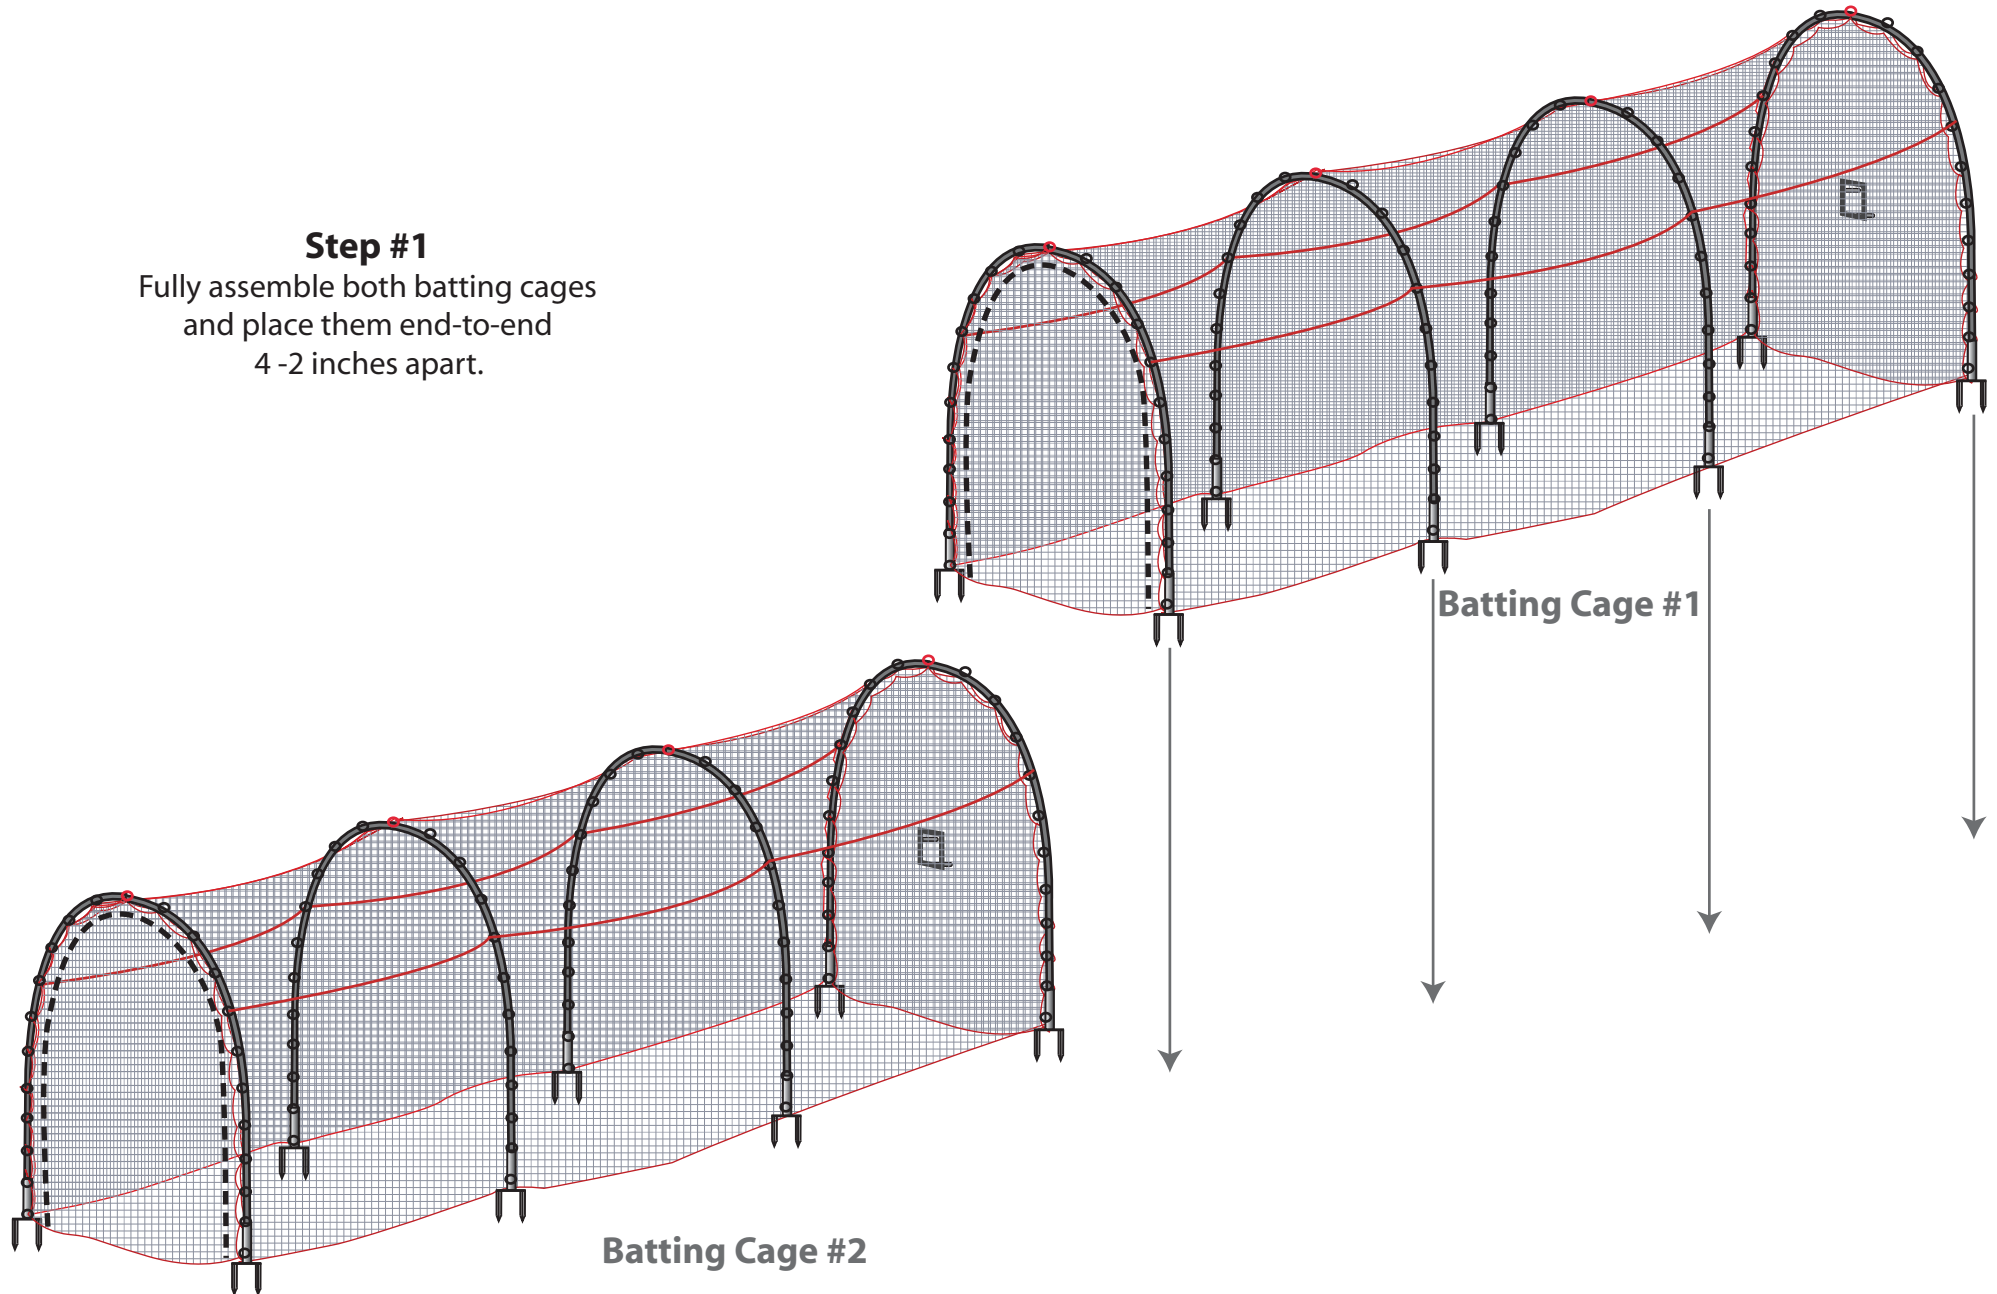


Joining 2 Cages

INSTRUCTIONS

Step #2


Match the red reinforced seams together where the cages meet. Using the **extra support ropes** weave the two cages together.

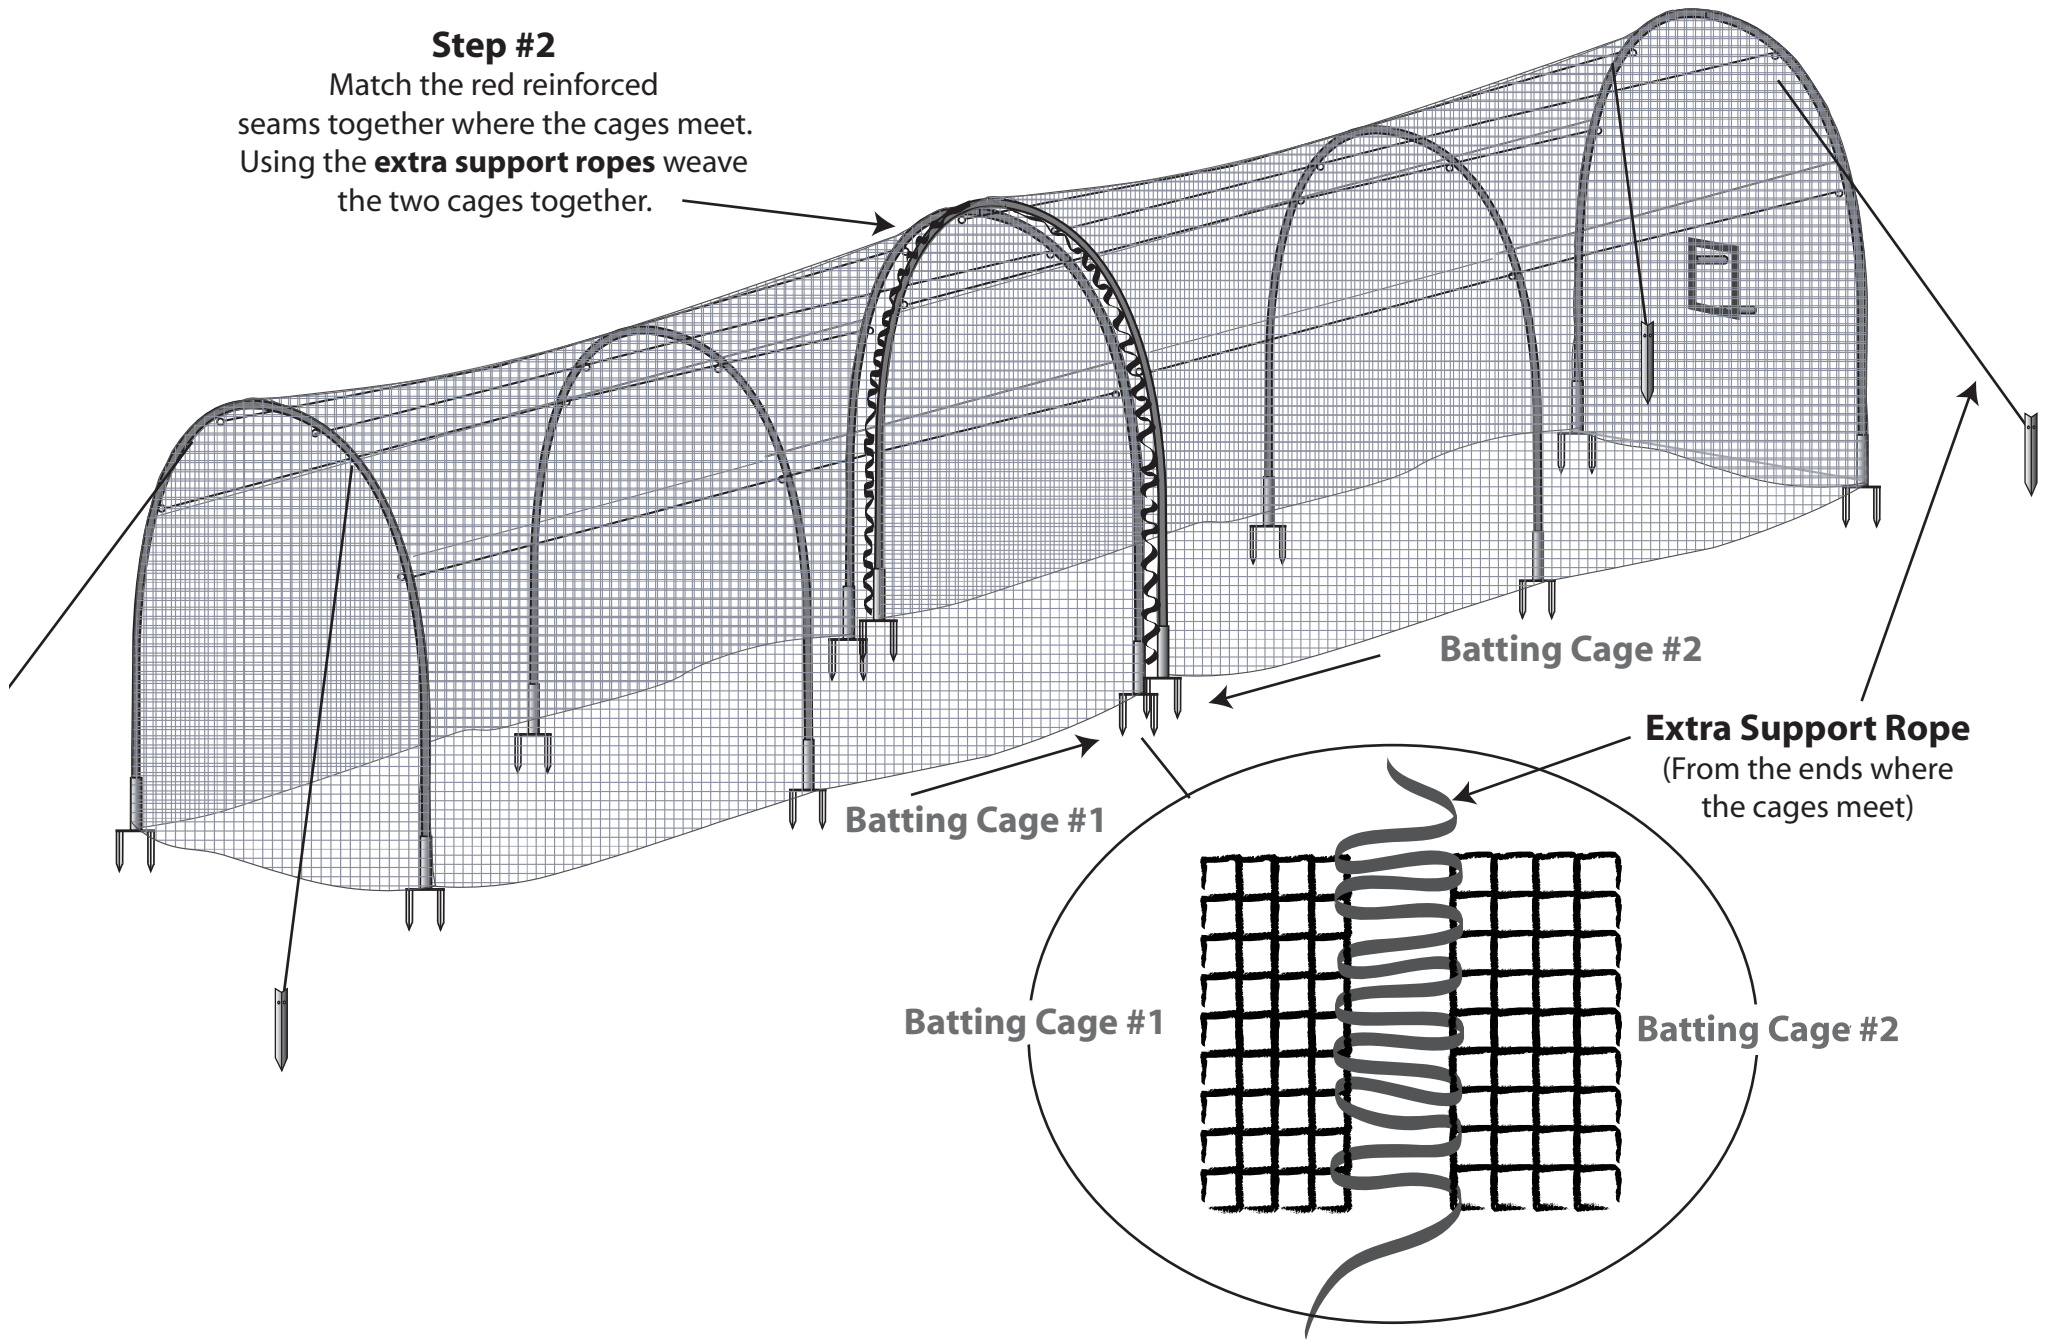

Joining 2 Cages INSTRUCTIONS

Step #3

Using scissors, cut an opening in the netting where the stitched netting come together on both cages.

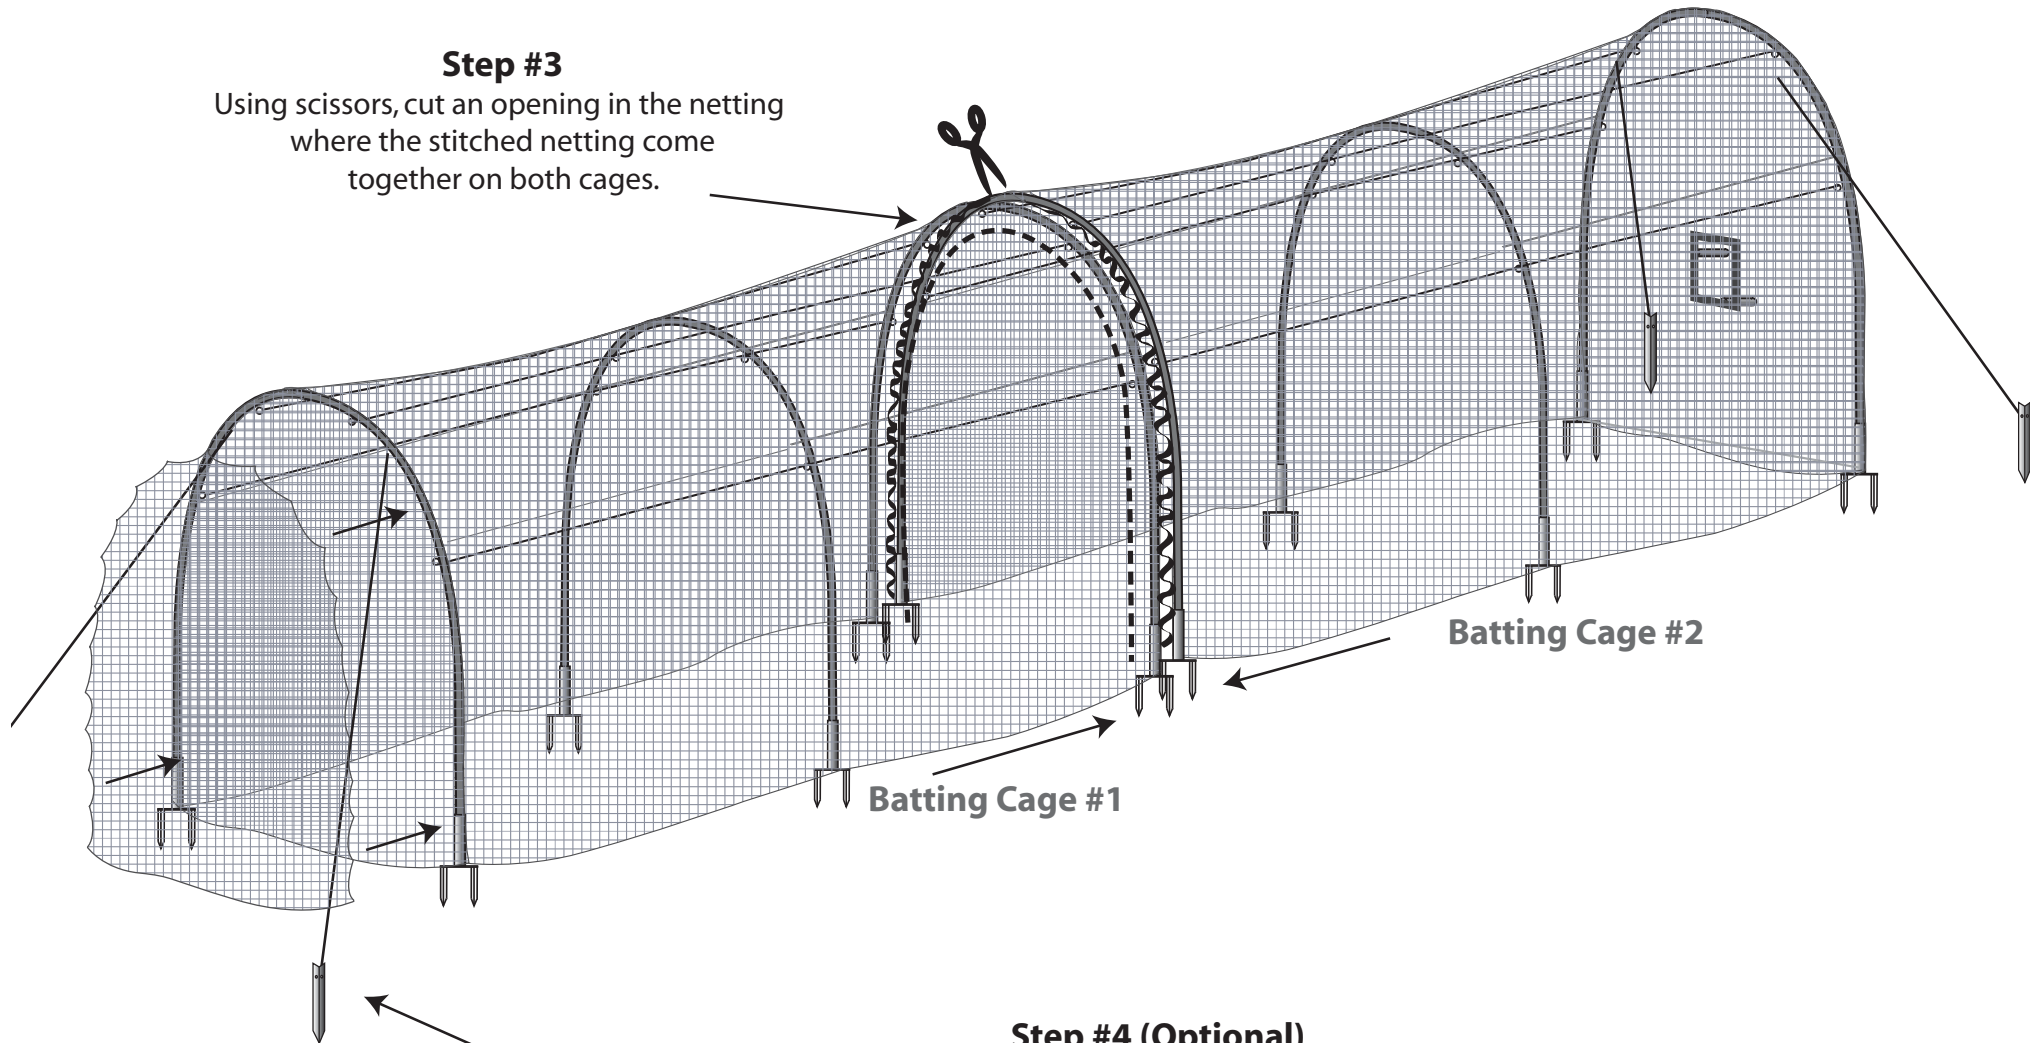

Step #4 (Optional)

After cutting the netting on both cages take the extra netting and attach it to the end of the cage opposite the Pitching Machine Harness. This extra netting will provide additional support and cushioning to the backstop area.